


2025.05

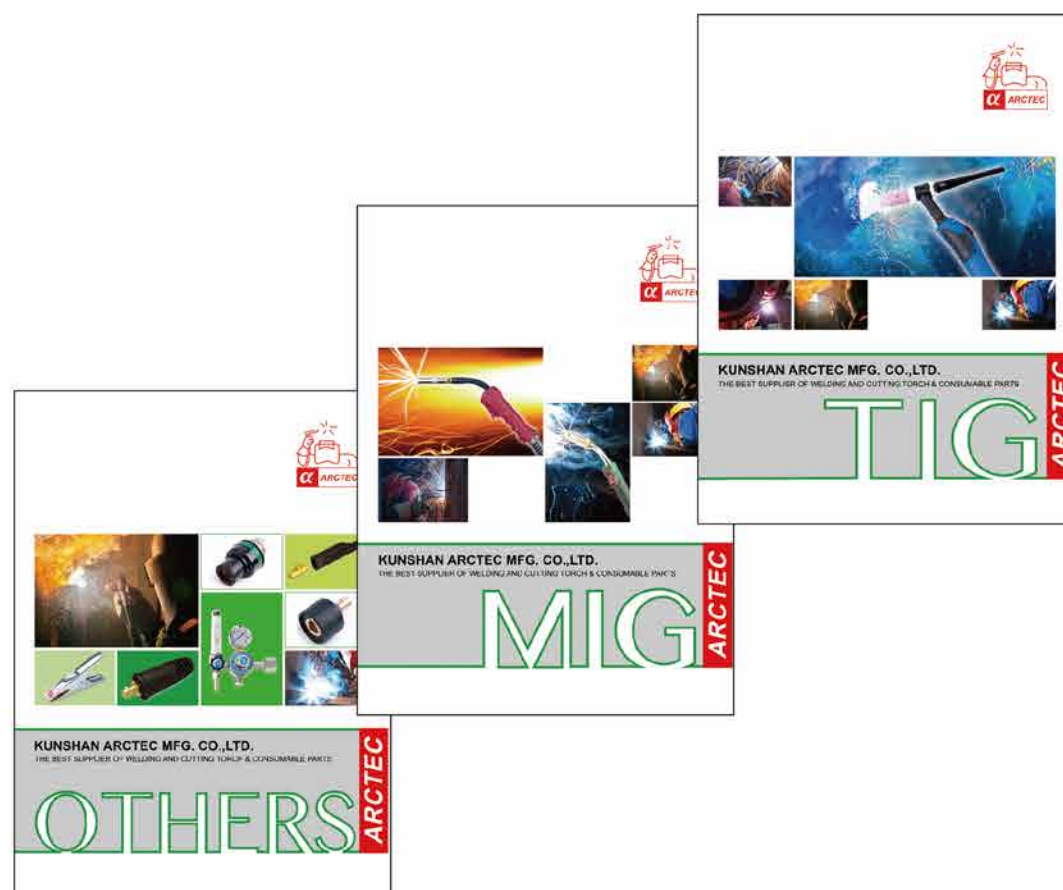

ALPHATEX COMPANY
乙皓行有限公司

Add: No.829,Zhonghua Rd.,Zhongli Dist.,
Taoyuan City,Taiwan R.O.C. 32068

Tel: +886-3-4610505

Fax: +886-3-4612504

E-mail: alphetextw@yahoo.com.tw

Http://www.alphatex.com.cn



KUNSHAN ARCTEC MFG. CO.,LTD.
昆山日皓智能装备制造有限公司

Add: No.1 Huancheng Rd.(W) Zhengyi,Kunshan
City,Jiangsu Province China 215347

Tel: +86-512-57786565

Fax: +86-512-57786642

E-mail: alphetex@alphatex.com.cn

Http://www.alphatex.com.cn

KUNSHAN ARCTEC MFG. CO.,LTD.

THE BEST SUPPLIER OF WELDING AND CUTTING TORCH & CONSUMABLE PARTS

ROBOT

ARCtec

助力中国制造2025
我们有备而来

30位
焊枪研发专员

45年
焊枪定制经验

50台
进口/国产数控加工设备

7500平方
工厂占地规模

6项
发明专利

30余项
实用新型专利



日皓机器人焊枪 进口品牌替代者



Purchase Guide
订购说明


MIG Torch Model Guide
机器人焊枪型号说明

ARH	18	501	W	CP	1.0M	PN
<i>Shock censor</i> 防撞款型 <i>ARH: Hollowrist</i> 内置式 <i>ARS: Standard</i> 外置式	<i>Rating</i> 承载电流 150: 150A 300: 300A 350: 350A 430: 430A 500: 500A 301: 300A 501: 500A 651: 650A	<i>Cooling</i> 冷却类型 <i>Empty</i> 无 <i>Air</i> 空冷 <i>W: Water</i> 水冷 <i>N: Narrow</i> 空冷窄缝	<i>Wire brake</i> 夹丝功能 <i>Optional</i> 全系可选配	<i>Cable Assy</i> length 电缆长度	<i>End connection</i> 送丝机接口 <i>PN(Panasonic)</i> : 松下 <i>EURO</i> : 欧式 <i>OTC</i> : 欧地希 <i>LCN(Lincoln)</i> : 林肯	
<i>Shock censor model</i> 防撞型号 <i>Hollowrist</i> 内置式: 01: <i>Air</i> 06: <i>Air</i> 08: <i>Air</i> 18: <i>Water</i> <i>Standard</i> 外置式: 02: <i>Air</i> 06: <i>Air</i> 08: <i>Water</i>						


Cable Assy Robo Length Calculaton Information
机器人焊枪电缆长度确认

Information Offer AS “?” Mark
电缆长度计算, 需提供以下 “?” 数据

Robot Hollowrist
内置机器人:

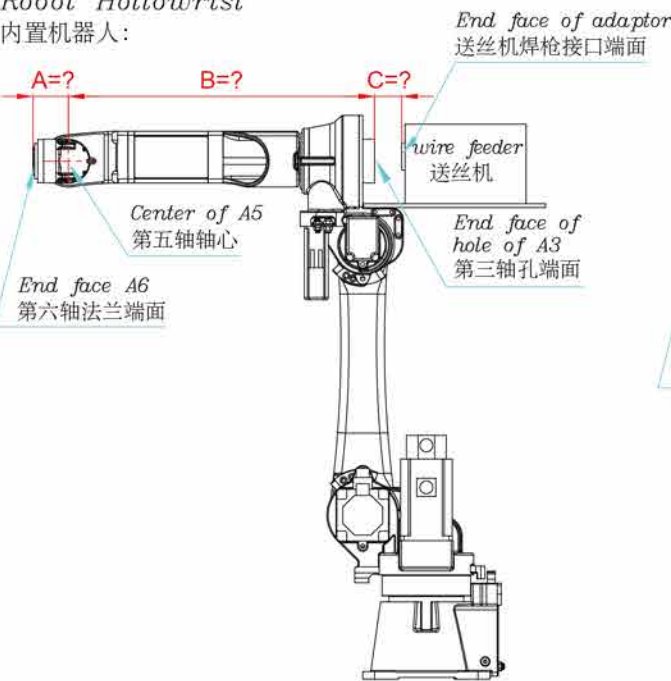

Robot Standard
外置机器人:

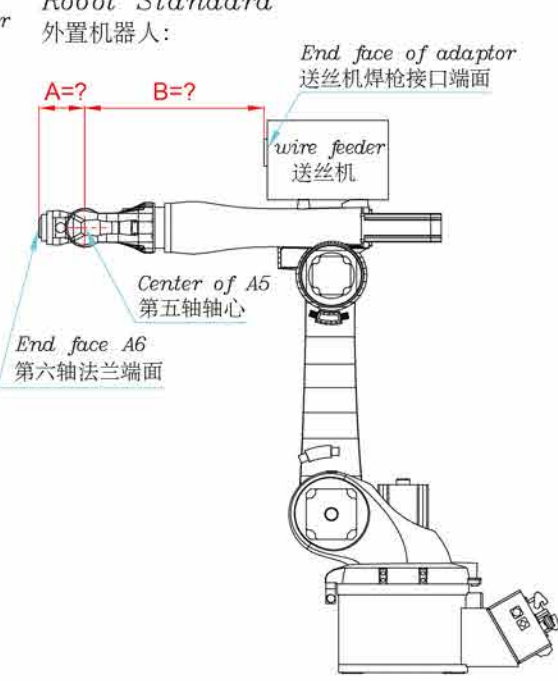

ARH08350/ARH08500/ARH08430

MIG Torch Air Robo Hollowrist

MIG 机器人焊枪 空冷 内置式



	350	500	430
Rating 额定电流 (MIG)	350A	500A	430A
Rating 额定电流 (MAG)	300A	400A	380A
Duty cycle 使用率	60%	50%	50%
Wire Ø 适用焊丝	0.8~1.2	1.2~1.6	0.8~1.2




Shock Sensor ARH08 Technical data(IEC60974-7) 碰撞传感器ARH08技术参数	
Max.deflection 最大偏移量	11°
Triggering the emergency-off switch (X&Y plane) 即时止动 (X&Y轴)	1.3°
Resetting accuracy 可重复性	TCP回位精度 横向误差在 ±0.2mm (法兰盘起300mm长)
Rotation Limited 旋转范围	零点 (中间) 位置起 ±220°

* Mark: Std. configuration 标准配置

350 Parts

350 鹅颈及配件

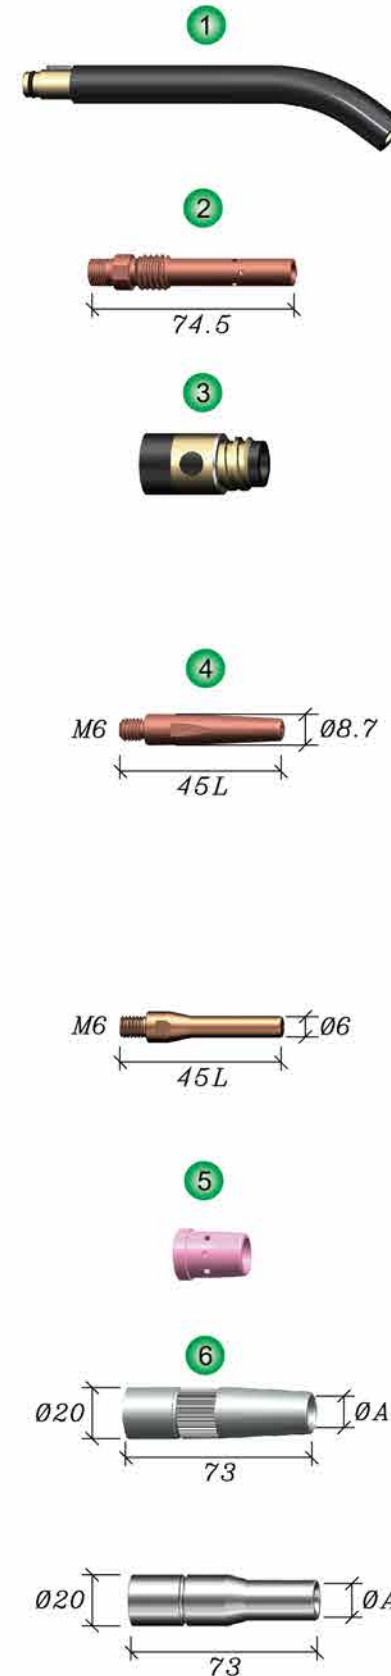

Neck 鹅颈

CODE	DESCRIPTION
BU-20200	Neck 180Dg 350/500
BU-20201	Neck 22Dg 350/500
*BU-20202	Neck 36Dg 350/500
BU-20203	Neck 45Dg 350/500

Tip holder 导电嘴座

CODE	DESCRIPTION
BG-01405	CuCrZr M10*M6*74.5L

Insulator 绝缘筒

CODE	DESCRIPTION
BG-01000	Insulator 350A

Tip 导电嘴

CODE	DESCRIPTION
*BG-05801A	CuCrZr 0.8
*BG-05803A	CuCrZr 1.0
*BG-05804A	CuCrZr 1.2
BG-05805A	CuCrZr 1.6
BG-05871	CuCrZr 0.8 Alu
BG-05873	CuCrZr 1.0 Alu
BG-05874	CuCrZr 1.2 Alu
BG-05876	CuCrZr 1.6 Alu

Tip-Thin type 导电嘴-细径

CODE	DESCRIPTION
BG-05401	CuCrZr 0.8
BG-05403	CuCrZr 1.0
BG-05404	CuCrZr 1.2
BG-05406	CuCrZr 1.6

Gas diffuser 分气环

CODE	DESCRIPTION
BG-01200	CER#95

Nozzle 火口

CODE	DESCRIPTION
*BU-00500	ØA=Ø13
BU-00600	ØA=Ø16

Nozzle-Thin type 火口-细径

CODE	DESCRIPTION
BG-00836	ØA=Ø10
BG-00835	ØA=Ø12
BG-00834	ØA=Ø13


* Mark: Std. configuration 标准配置

500 Parts 500 鹅颈及配件



Neck 鹅颈

CODE	DESCRIPTION
BU-20200	Neck 180Dg 350/500
BU-20201	Neck 22Dg 350/500
*BU-20202	Neck 36Dg 350/500
BU-20203	Neck 45Dg 350/500




Tip holder 导电嘴座

CODE	DESCRIPTION
BG-01508	CuCrZr M10*M6*88.5L



Insulator 绝缘筒

CODE	DESCRIPTION
BG-01100	Insulator 500A




Tip 导电嘴

CODE	DESCRIPTION
*BG-05801A	CuCrZr 0.8
*BG-05803A	CuCrZr 1.0
*BG-05804A	CuCrZr 1.2
BG-05805A	CuCrZr 1.6
BG-05871	CuCrZr 0.8 Alu
BG-05873	CuCrZr 1.0 Alu
BG-05874	CuCrZr 1.2 Alu
BG-05876	CuCrZr 1.6 Alu



Gas diffuser 分气环

CODE	DESCRIPTION
BG-01300	CER#95

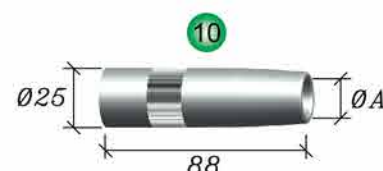


Nozzle 火口

CODE	DESCRIPTION
*BG-00700	$\varnothing A = \varnothing 16$
BG-00800	$\varnothing A = \varnothing 19$

* Mark: Std. configuration 标准配置

430 Parts 430 鹅颈及配件




Neck 鹅颈

CODE	DESCRIPTION
BU-20210	Neck 180Dg 430
BU-20211	Neck 22Dg 430
*BU-20212	Neck 36Dg 430
BU-20213	Neck 45Dg 430




Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05155	Brass M8*43L



Tip 导电嘴

CODE	DESCRIPTION
*BU-10501	CuCrZr 0.8
*BU-10503	CuCrZr 1.0
*BU-10504	CuCrZr 1.2
BU-10506	CuCrZr 1.6
BU-10511	CuCrZr 0.8 Alu
BU-10513	CuCrZr 1.0 Alu
BU-10514	CuCrZr 1.2 Alu
BU-10516	CuCrZr 1.6 Alu

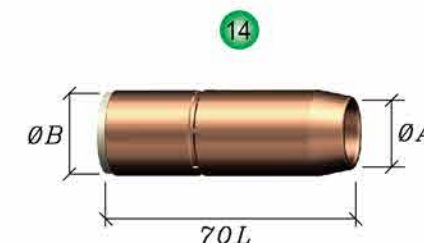

Nozzle 火口

CODE	DESCRIPTION
BU-01110	$\varnothing A = \varnothing 13$ $\varnothing B = \varnothing 24$ L=70
*BU-01115	$\varnothing A = \varnothing 16$ $\varnothing B = \varnothing 24$ L=70
BU-01130	$\varnothing A = \varnothing 16$ $\varnothing B = \varnothing 27$ L=70



Nozzle-Thin type 火口-细径

CODE	DESCRIPTION
BU-01120	$\varnothing A = \varnothing 13$ $\varnothing B = \varnothing 24$ L=70
*BU-01135	$\varnothing A = \varnothing 16$ $\varnothing B = \varnothing 27$ L=70

* Mark: Std. configuration 标准配置

Shock sensor and Flange

碰撞传感器及法兰组



Shock sensor 碰撞传感器

CODE	DESCRIPTION
BU-30250	Shock sensor ARH08



Shock sensor 碰撞传感器 夹丝

CODE	DESCRIPTION
BU-30255	Shock sensor with wire braker ARH08-CP




Flange adpt 法兰组

CODE	DESCRIPTION
	Flange ARH08

Power Cable Assy.

电缆总成 空冷

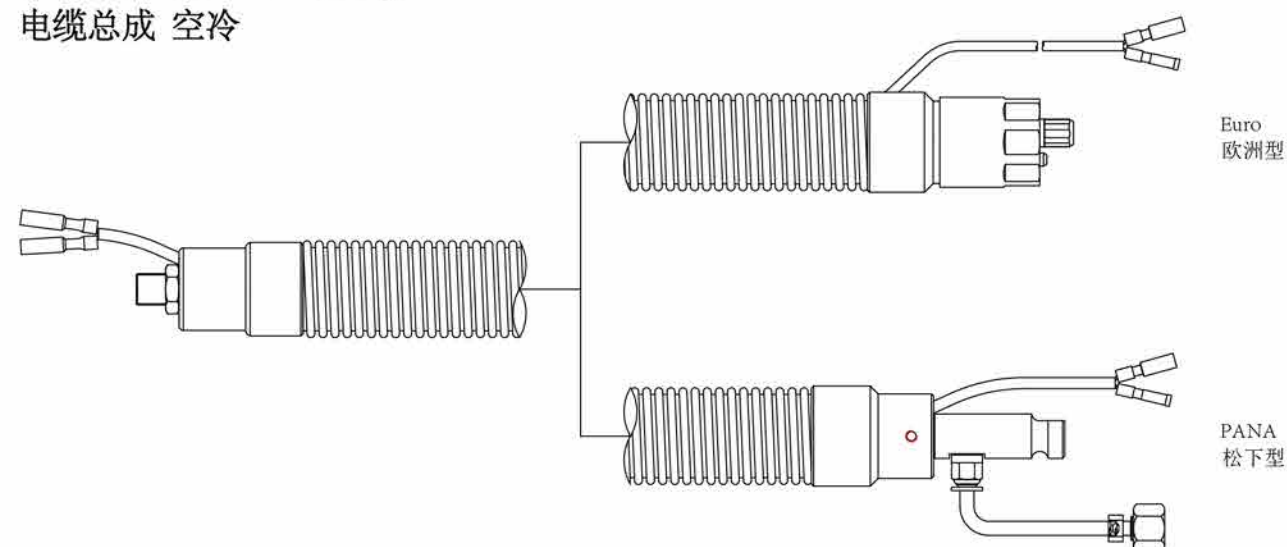

*连接送丝机接口有Euro, PANA, OTC, Lincoln.....等


* Mark: Std. configuration 标准配置

ARH08350 Different length of neck
ARH08350 不同长度鹅颈TCP参数

ANG 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
鹅颈角度	α	X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	442.2	0	542.2	0	642.2	0	742.2	0	842.2	0
22°	22°	431.7	56.2	531.7	56.2	631.7	56.2	731.7	56.2	831.7	56.2
36°	36°	413.3	94.3	513.3	94.3	613.3	94.3	713.3	94.3	813.3	94.3
46°	46°	396.5	118.5	496.5	118.5	596.5	118.5	696.5	118.5	796.5	118.5

ARH08350-CP Different length of neck
ARH08350-CP 不同长度鹅颈TCP参数

ANG 角度		L 长度		Standard 标准		+100L		+200L		+300L		+400L	
鹅颈角度	α	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	459.7	0	559.7	0	659.7	0	759.7	0	859.7	0		
22°	22°	449.2	56.2	549.2	56.2	649.2	56.2	749.2	56.2	849.2	56.2		
36°	36°	430.8	94.3	530.8	94.3	630.8	94.3	730.8	94.3	830.8	94.3		
46°	46°	414	118.5	514	118.5	614	118.5	714	118.5	814	118.5		

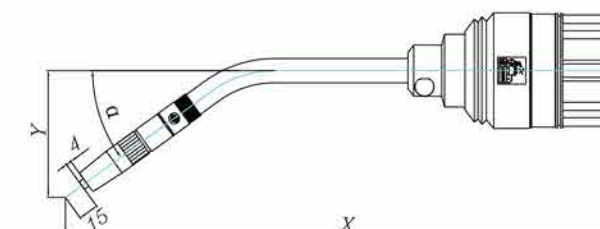


ARH08500 Different length of neck
ARH08500 不同长度鹅颈TCP参数

ANCL 角度	长度	Standard 标准		+100L		+200L		+300L		+400L	
鹅颈角度	α	X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	456.2	0	556.2	0	656.2	0	756.2	0	856.2	0
22°	22°	444.6	61.5	544.6	61.5	644.6	61.5	744.6	61.5	844.6	61.5
36°	36°	424.6	102.6	524.6	102.6	624.6	102.6	724.6	102.6	824.6	102.6
46°	46°	406.4	128.4	506.4	128.4	606.4	128.4	706.4	128.4	806.4	128.4

ARH08500-CP Different length of neck
ARH08500-CP 不同长度鹅颈TCP参数

L 长度		Standard 标准		+100L		+200L		+300L		+400L	
AN 角度	α	X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	473.7	0	573.7	0	673.7	0	773.7	0	873.7	0
22°	22°	462.1	61.5	562.1	61.5	662.1	61.5	762.1	61.5	862.1	61.5
36°	36°	442.1	102.6	542.1	102.6	642.1	102.6	742.1	102.6	842.1	102.6
46°	46°	423.9	128.4	523.9	128.4	623.9	128.4	723.9	128.4	823.9	128.4

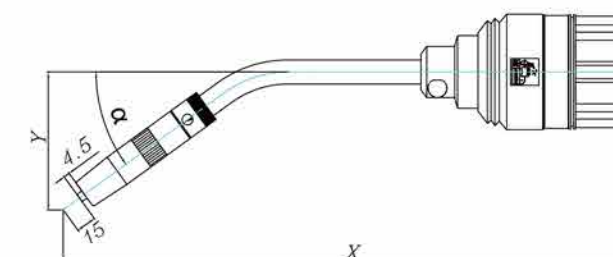


ARH08430 Different length of neck
ARH08430 不同长度鹅颈TCP参数

ANCO L 长度		Standard 标准		+100L		+200L		+300L		+400L	
鹅颈角度 α		X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	394.6	0	494.6	0	594.6	0	694.6	0	794.6	0
22°	22°	385.6	48.2	485.6	48.2	585.6	48.2	685.6	48.2	785.6	48.2
36°	36°	369.8	81.8	469.8	81.8	569.8	81.8	669.8	81.8	769.8	81.8
46°	46°	355.2	103.4	455.2	103.4	555.2	103.4	655.2	103.4	755.2	103.4

ARH08430-CP Different length of neck
ARH08430-CP 不同长度鹅颈TCP参数

ANCO 角度		L 长度	Standard 标准		+100L		+200L		+300L		+400L	
鹅颈角度	α	X	Y	X	Y	X	Y	X	Y	X	Y	
0°	0°	412.1	0	512.1	0	612.1	0	712.1	0	812.1	0	
22°	22°	403.1	48.2	503.1	48.2	603.1	48.2	703.1	48.2	803.1	48.2	
36°	36°	387.3	81.8	487.3	81.8	587.3	81.8	687.3	81.8	787.3	81.8	
46°	46°	372.7	103.4	472.7	103.4	572.7	103.4	672.7	103.4	772.7	103.4	

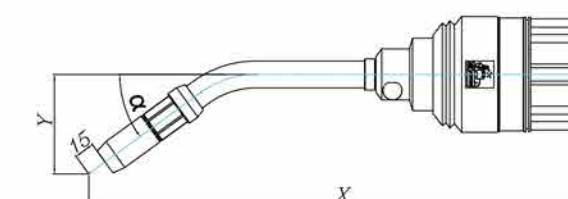

* Mark: Std. configuration 标准配置

ARH06350/ARH06500
ARH06150N/ARH06300N
MIG Torch Air Robo Hollowrist
MIG 机器人焊枪 空冷 内置式



	350	500	150N	300N
Rating 额定电流 (MIG)	350A	500A	150A	300A
Rating 额定电流 (MAG)	300A	400A	100A	250A
Duty cycle 使用率	60%	50%	60%	60%
Wire Ø 适用焊丝	0.6~1.2	1.2~1.6	0.8~1.0	0.8~1.2




Shock Sensor ARH06 Technical data(IEC60974-7) 碰撞传感器ARH06技术参数	
Max.deflection 最大偏移量	17°
Triggering the emergency-off switch (X&Y plane) 即时止动 (X&Y轴)	3°
Resetting accuracy 可重复性	TCP回位精度 横向误差在 ±0.2mm (法兰盘起300mm长)
Rotation Limited 旋转范围	零点 (中间) 位置起±220°

* Mark: Std. configuration 标准配置

ARS06350/ARS06500
ARS06150N/ARS06300N
MIG Torch Air Robo
MIG 机器人焊枪 空冷 外置式






	350	500	150N	300N
Rating 额定电流 (MIG)	350A	500A	150A	300A
Rating 额定电流 (MAG)	300A	400A	100A	250A
Duty cycle 使用率	60%	50%	60%	60%
Wire Ø 适用焊丝	0.6~1.2	1.2~1.6	0.8~1.0	0.8~1.2

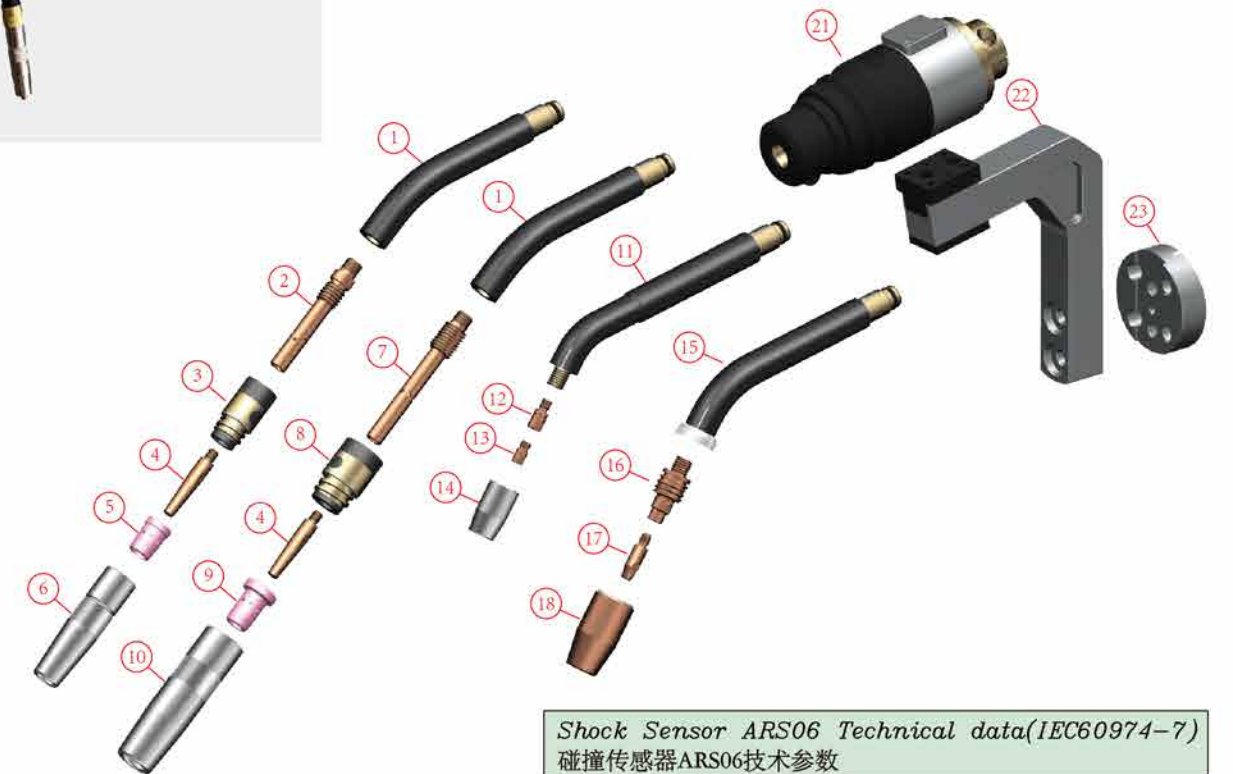

Shock Sensor ARS06 Technical data(IEC60974-7) 碰撞传感器ARS06技术参数	
Max.deflection 最大偏移量	17°
Triggering the emergency-off switch (X&Y plane) 即时止动 (X&Y轴)	3°
Resetting accuracy 可重复性	TCP回位精度 横向误差在 ±0.2mm (法兰盘起300mm长)

* Mark: Std. configuration 标准配置

350 Parts 350 鹅颈及配件

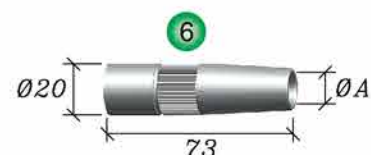

Neck 鹅颈

CODE	DESCRIPTION
BU-20050	Neck 180Dg 350/500
BU-20040	Neck 22Dg 350/500
*BU-20020	Neck 31Dg 350/500
BU-20030	Neck 45Dg 350/500

Tip holder 导电嘴座

CODE	DESCRIPTION
BG-01405	CuCrZr M10*M6*74.5L

Insulator 绝缘筒

CODE	DESCRIPTION
BG-01000	Insulator 350A

Tip 导电嘴

CODE	DESCRIPTION
*BG-05801A	CuCrZr 0.8
*BG-05803A	CuCrZr 1.0
*BG-05804A	CuCrZr 1.2
BG-05805A	CuCrZr 1.6
BG-05871	CuCrZr 0.8 Alu
BG-05873	CuCrZr 1.0 Alu
BG-05874	CuCrZr 1.2 Alu
BG-05876	CuCrZr 1.6 Alu

Tip-Thin type 导电嘴-细径

CODE	DESCRIPTION
BG-05401	CuCrZr 0.8
BG-05403	CuCrZr 1.0
BG-05404	CuCrZr 1.2
BG-05406	CuCrZr 1.6

Gas diffuser 分气环

CODE	DESCRIPTION
BG-01200	CER#95

Nozzle 火口




CODE	DESCRIPTION
*BU-00500	ØA=Ø13
BU-00600	ØA=Ø16

Nozzle-Thin type 火口-细径

CODE	DESCRIPTION
BG-00836	ØA=Ø10
BG-00835	ØA=Ø12
BG-00834	ØA=Ø13

* Mark: Std. configuration 标准配置

500 Parts 500 鹅颈及配件

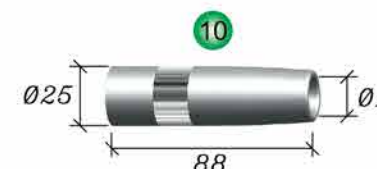

Neck 鹅颈

CODE	DESCRIPTION
BU-20050	Neck 180Dg 350/500
BU-20040	Neck 22Dg 350/500
*BU-20020	Neck 31Dg 350/500
BU-20030	Neck 45Dg 350/500

Tip holder 导电嘴座

CODE	DESCRIPTION
BG-01508	CuCrZr M10*M6*88.5L

Insulator 绝缘筒

CODE	DESCRIPTION
BG-01100	Insulator 500A

Tip 导电嘴

CODE	DESCRIPTION
*BG-05801A	CuCrZr 0.8
*BG-05803A	CuCrZr 1.0
*BG-05804A	CuCrZr 1.2
BG-05805A	CuCrZr 1.6
BG-05871	CuCrZr 0.8 Alu
BG-05873	CuCrZr 1.0 Alu
BG-05874	CuCrZr 1.2 Alu
BG-05876	CuCrZr 1.6 Alu

Gas diffuser 分气环

CODE	DESCRIPTION
BG-01300	CER#95

Nozzle 火口

CODE	DESCRIPTION
*BG-00700	ØA=Ø16
BG-00800	ØA=Ø19

* Mark: Std. configuration 标准配置


150N Parts 150N 鹅颈及配件



12



13



14



300N Parts 300N 鹅颈及配件



16



17



18



* Mark: Std. configuration 标准配置

Neck 鹅颈

CODE	DESCRIPTION
*BU-21130	Neck 45Dg 150N

Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05200	Cu M6*M6*18L

Tip 导电嘴

CODE	DESCRIPTION
*BU-10201	CuCrZr 0.8
*BU-10203	CuCrZr 1.0
*BU-10204	CuCrZr 1.2
BU-10206	CuCrZr 1.6

Nozzle 火口

CODE	DESCRIPTION
*BU-01300	$\varnothing A = \varnothing 13$

Neck 鹅颈

CODE	DESCRIPTION
*BU-21140	Neck 45Dg 300N

Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05205	Cu M10-1*M6*38.5L

Tip 导电嘴

CODE	DESCRIPTION
*BU-10181	CuCrZr 0.8
*BU-10183	CuCrZr 1.0
*BU-10184	CuCrZr 1.2
BU-10186	CuCrZr 1.6

Nozzle 火口

CODE	DESCRIPTION
*BU-01310	$\varnothing A = \varnothing 4$

Shock sensor and Flange 碰撞传感器及法兰组



20



21



22



23



Shock sensor 碰撞传感器

CODE	DESCRIPTION
BU-30750	Shock sensor ARH06

Flange adpt 法兰组

CODE	DESCRIPTION
	Flange ARH06

Shock sensor 碰撞传感器

CODE	DESCRIPTION
BU-30700	Shock sensor ARS06


Bracket assy 支架组

CODE	DESCRIPTION
BU-35681	Bracket assy ARS06

Flange adpt 法兰组

CODE	DESCRIPTION
	Flange ARS02/ARS06

Power Cable Assy. 电缆总成 空冷

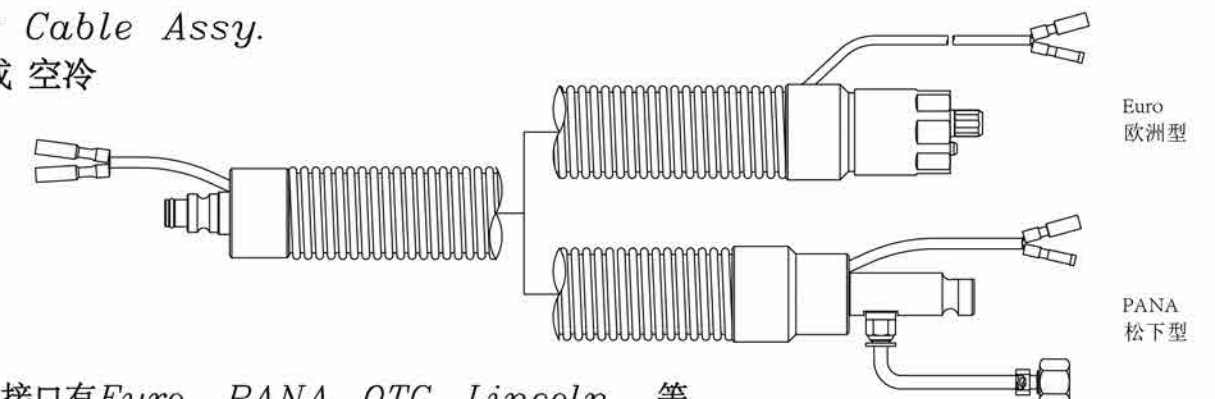


* 连接送丝机接口有Euro, PANA, OTC, Lincoln.....等

* Mark: Std. configuration 标准配置


ARH06350 Different length of neck
ARH06350 不同长度鹅颈 TCP 参数

L 长度 ANC 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	0°	434.7	0	534.7	0	634.7	0	734.7	0
22°	22°	424.2	56.2	524.2	56.2	624.2	56.2	724.2	56.2
31°	31°	413.9	80.5	513.9	80.5	613.9	80.5	713.9	80.5
45°	45°	391	118.5	491	118.5	591	118.5	691	118.5

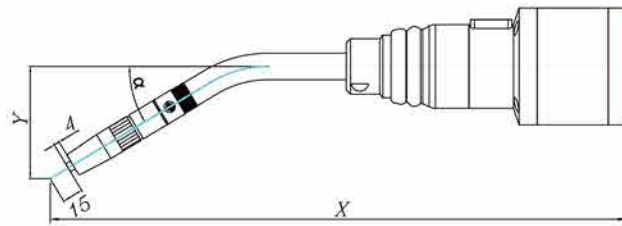


ARS06350 Different length of neck
ARS06350 不同长度鹅颈 TCP 参数

L 长度 ANC 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	10°	465.9	84.8	564.4	67.4	662.9	50.1	761.3	32.7
22°	32°	445.8	31.3	544.2	13.9	642.7	-3.4	741.2	-20.8
31°	41°	431	9.2	529.5	-8.1	628	-25.5	726.5	-42.9
45°	55°	400.4	-24	498.8	-41.4	597.3	-58.7	695.8	-76.1

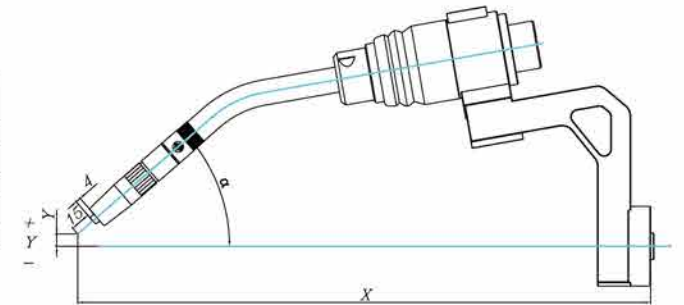


ARH06500 Different length of neck
ARH06500 不同长度鹅颈 TCP 参数

L 长度 ANC 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	0°	448.7	0	548.7	0	648.7	0	748.7	0
22°	22°	437.1	61.5	537.1	61.5	637.1	61.5	737.1	61.5
31°	31°	425.5	87.7	525.5	87.7	625.5	87.7	725.5	87.7
45°	45°	398.9	128.4	498.9	128.4	598.9	128.4	698.9	128.4

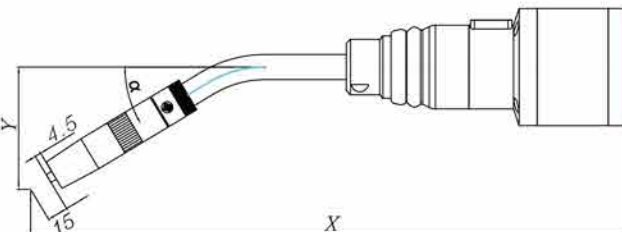


ARS06500 Different length of neck
ARS06500 不同长度鹅颈 TCP 参数

L 长度 ANC 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	10°	479.7	82.4	578.2	65	676.6	47.7	775.1	30.3
22°	32°	457.6	23.9	556.1	6.5	654.6	-10.9	753.1	-28.2
31°	41°	441.6	0	540.1	-17.3	638.5	-34.7	737	-52.1
45°	55°	408.4	-35.5	506.9	-52.8	605.3	-70.2	703.8	-87.6

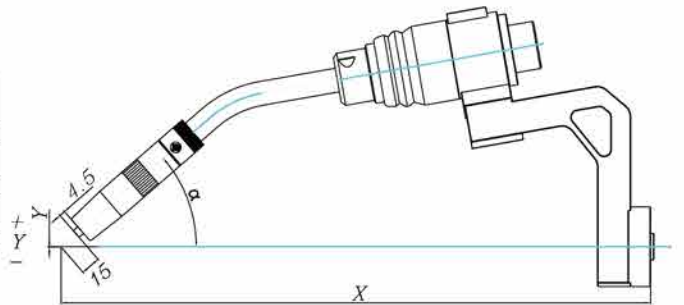


ARH06150N Different length of neck
ARH06150N 不同长度鹅颈 TCP 参数

L 长度 ANC 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	0°	390	0	490	0	590	0	690	0
45°	45°	372.2	46.7	472.2	46.7	572.2	46.7	672.2	46.7

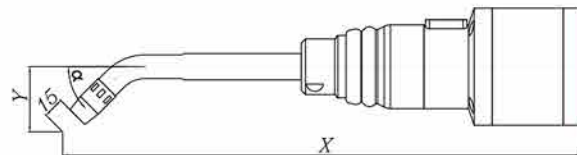


ARS06150N Different length of neck
ARS06150N 不同长度鹅颈 TCP 参数

L 长度 ANC 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	10°	421.9	92.6	520.4	75.2	618.8	57.8	717.3	40.5
45°	55°	396.3	49.6	494.8	32.3	593.2	14.9	691.7	-2.5

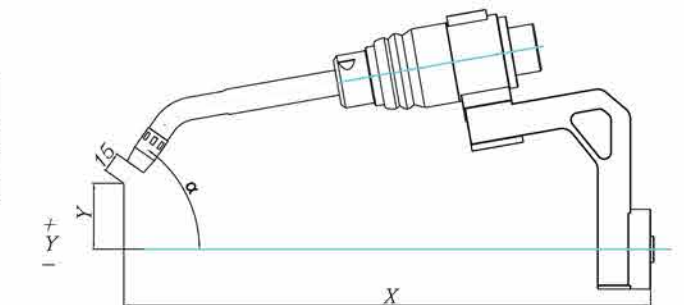


ARH06300N Different length of neck
ARH06300N 不同长度鹅颈 TCP 参数

L 长度 ANC 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	0°	399.5	0	499.5	0	599.5	0	699.5	0
45°	45°	372.6	70.2	472.6	70.2	572.6	70.2	672.6	70.2

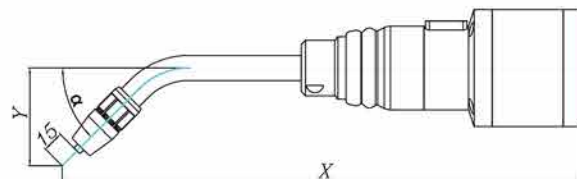

ARS06300N Different length of neck
ARS06300N 不同长度鹅颈 TCP 参数

L 长度 ANC 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	10°	431.2	90.9	529.7	73.6	628.2	56.2	726.7	38.8
45°	55°	392.6	26.5	491	9.1	589.5	-8.2	688	-25.6

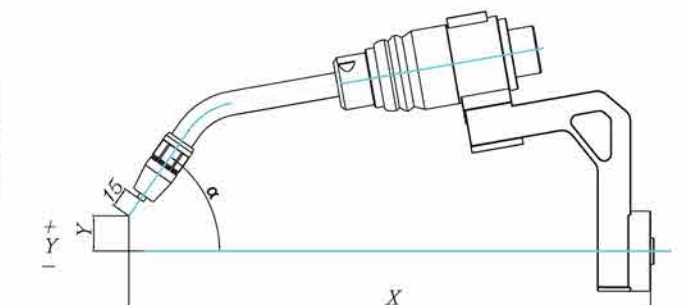

* Mark: Std. configuration 标准配置

* Mark: Std. configuration 标准配置

ARH01350/ARH01500
ARH01150N/ARH01300N
MIG Torch Air Robo Hollowrist
MIG 机器人焊枪 空冷 内置式



	350	500	150N	300N
Rating 额定电流 (MIG)	350A	500A	150A	300A
Rating 额定电流 (MAG)	300A	400A	100A	250A
Duty cycle 使用率	60%	50%	60%	60%
Wire Ø 适用焊丝	0.6~1.2	1.2~1.6	0.8~1.0	0.8~1.2




Shock Sensor ARH01 Technical data(IEC60974-7) 碰撞传感器ARH01技术参数	
Max.deflection 最大偏移量	13°
Triggering the emergency-off switch (X&Y plane) 即时止动 (X&Y轴)	3.5°
Resetting accuracy 可重复性	TCP回位精度 横向误差在 ±0.2mm (法兰盘起300mm长)
Rotation Limited 旋转范围	零点 (中间) 位置起±220°

* Mark: Std. configuration 标准配置

ARS02350/ARS02500
ARS02150N/ARS02300N
MIG Torch Air Robo
MIG 机器人焊枪 空冷 外置式





	350	500	150N	300N
Rating 额定电流 (MIG)	350A	500A	150A	300A
Rating 额定电流 (MAG)	300A	400A	100A	250A
Duty cycle 使用率	60%	50%	60%	60%
Wire Ø 适用焊丝	0.6~1.2	1.2~1.6	0.8~1.0	0.8~1.2

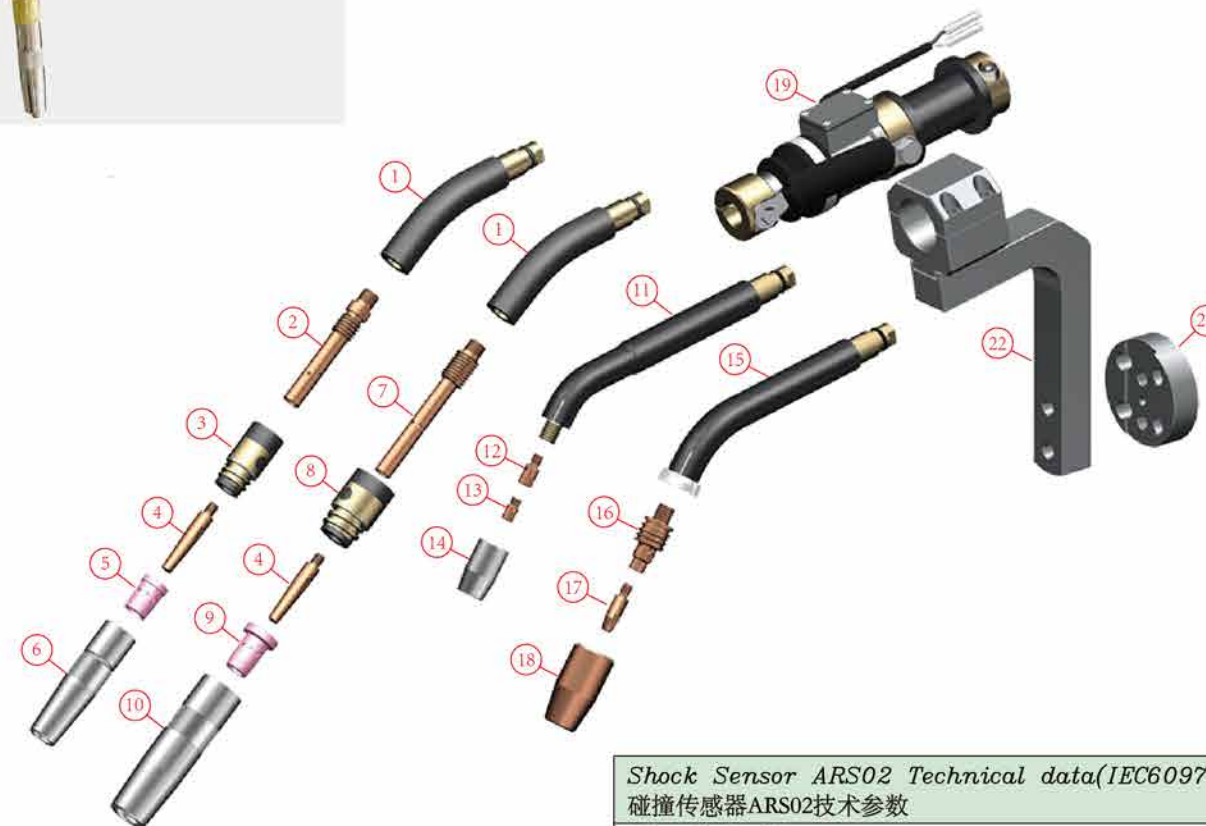

Shock Sensor ARS02 Technical data(IEC60974-7) 碰撞传感器ARS02技术参数	
Max.deflection 最大偏移量	13°
Triggering the emergency-off switch (X&Y plane) 即时止动 (X&Y轴)	3.5°
Resetting accuracy 可重复性	TCP回位精度 横向误差在 ±0.2mm (法兰盘起300mm长)

* Mark: Std. configuration 标准配置

350 Parts 350 鹅颈及配件

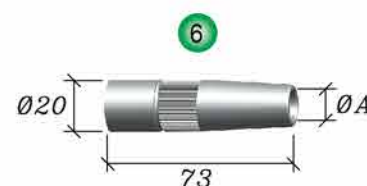

* Mark: Std. configuration 标准配置

Neck 鹅颈

CODE	DESCRIPTION
BG-01831	Neck 180Dg 350/500
*BG-01830	Neck 31Dg 350/500
BG-01835	Neck 35Dg 350/500
BG-01840	Neck 45Dg 350/500

Tip holder 导电嘴座

CODE	DESCRIPTION
BG-01405	CuCrZr M10*M6*74.5L

Insulator 绝缘筒

CODE	DESCRIPTION
BG-01000	Insulator 350A

Tip 导电嘴

CODE	DESCRIPTION
*BG-05801A	CuCrZr 0.8
*BG-05803A	CuCrZr 1.0
*BG-05804A	CuCrZr 1.2
BG-05805A	CuCrZr 1.6
BG-05871	CuCrZr 0.8 Alu
BG-05873	CuCrZr 1.0 Alu
BG-05874	CuCrZr 1.2 Alu
BG-05876	CuCrZr 1.6 Alu

Tip-Thin type 导电嘴-细径

CODE	DESCRIPTION
BG-05401	CuCrZr 0.8
BG-05403	CuCrZr 1.0
BG-05404	CuCrZr 1.2
BG-05406	CuCrZr 1.6

Gas diffusor 分气环

CODE	DESCRIPTION
BG-01200	CER#95




Nozzle 火口

CODE	DESCRIPTION
*BG-00500	ØA=Ø13
BG-00600	ØA=Ø16

Nozzle-Thin type 火口-细径

CODE	DESCRIPTION
BG-00836	ØA=Ø10
BG-00835	ØA=Ø12
BG-00834	ØA=Ø13

500 Parts 500 鹅颈及配件

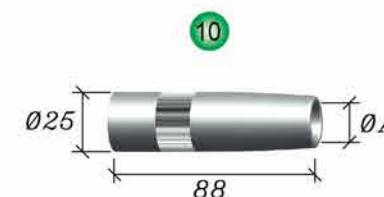

* Mark: Std. configuration 标准配置

Neck 鹅颈

CODE	DESCRIPTION
BG-01831	Neck 180Dg 350/500
*BG-01830	Neck 31Dg 350/500
BG-01835	Neck 35Dg 350/500
BG-01840	Neck 45Dg 350/500

Tip holder 导电嘴座

CODE	DESCRIPTION
BG-01508	CuCrZr M10*M6*88.5L

Insulator 绝缘筒

CODE	DESCRIPTION
BG-01100	Insulator 500A

Tip 导电嘴

CODE	DESCRIPTION
*BG-05801A	CuCrZr 0.8
*BG-05803A	CuCrZr 1.0
*BG-05804A	CuCrZr 1.2
BG-05805A	CuCrZr 1.6
BG-05871	CuCrZr 0.8 Alu
BG-05873	CuCrZr 1.0 Alu
BG-05874	CuCrZr 1.2 Alu
BG-05876	CuCrZr 1.6 Alu


Gas diffusor 分气环

CODE	DESCRIPTION
BG-01300	CER#95

Nozzle 火口

CODE	DESCRIPTION
*BG-00700	ØA=Ø16
BG-00800	ØA=Ø19

150N Parts 150N 鹅颈及配件

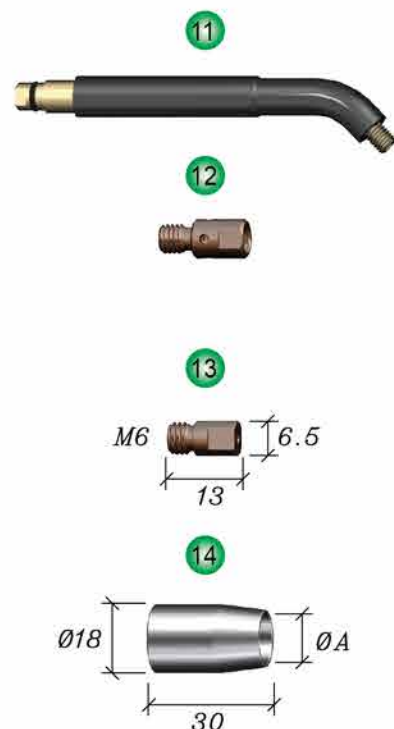

Neck 鹅颈

CODE	DESCRIPTION
*BU-21100	Neck 45Dg 150N

Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05200	Cu M6*M6*18L


Tip 导电嘴

CODE	DESCRIPTION
*BU-10201	CuCrZr 0.8
*BU-10203	CuCrZr 1.0
*BU-10204	CuCrZr 1.2
BU-10206	CuCrZr 1.6

Nozzle 火口

CODE	DESCRIPTION
*BU-01300	ØA=Ø13

300N Parts 300N 鹅颈及配件

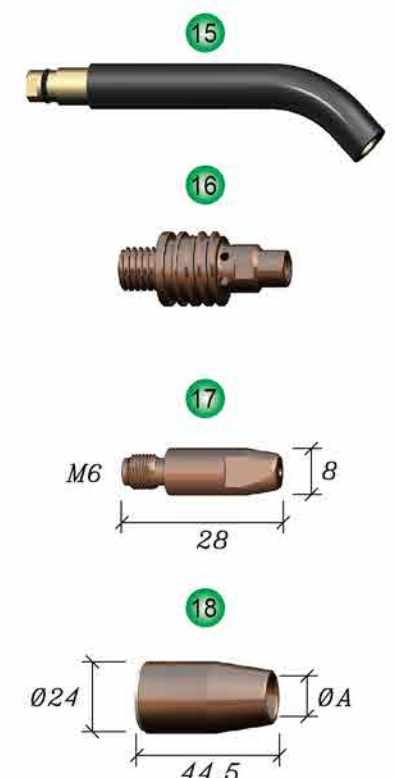

Neck 鹅颈

CODE	DESCRIPTION
*BU-21110	Neck 45Dg 300N

Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05205	Cu M10-1*M6*38.5L

Tip 导电嘴

CODE	DESCRIPTION
*BU-10181	CuCrZr 0.8
*BU-10183	CuCrZr 1.0
*BU-10184	CuCrZr 1.2
BU-10186	CuCrZr 1.6

Nozzle 火口

CODE	DESCRIPTION
*BU-01310	ØA=Ø14

* Mark: Std. configuration 标准配置

Shock sensor and Flange 碰撞传感器及法兰组



Shock sensor 碰撞传感器

CODE	DESCRIPTION
BU-30060	Shock sensor ARH01/ARS02

Bracket assy 支架组

CODE	DESCRIPTION
BU-35610A	Bracket assy ARH01

Flange adpt 法兰组

CODE	DESCRIPTION
	Flange ARH01


Bracket assy 支架组

CODE	DESCRIPTION
BU-35650	Bracket assy ARS02

Flange adpt 法兰组

CODE	DESCRIPTION
	Flange ARS02/ARS06

Power Cable Assy. 电缆总成 空冷

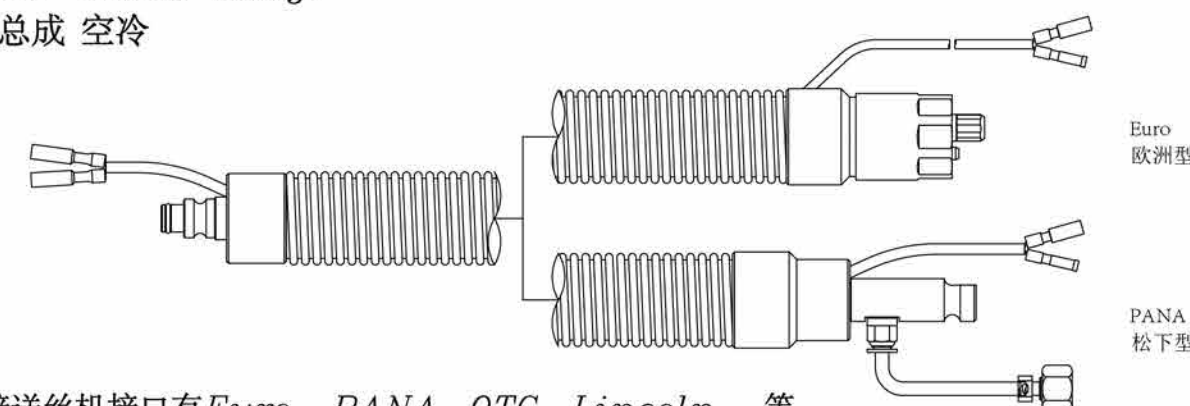


*连接送丝机接口有Euro, PANA, OTC, Lincoln.....等

* Mark: Std. configuration 标准配置


ARH01350 Different length of neck
ARH01350 不同长度颈 TCP 参数

ANC 角度		Standard 标准		+100L		+200L		+300L		+400L	
倾斜角度	α	X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	449.1	0	549.1	0	649.1	0	749.1	0	849.1	0
22°	22°	438.3	57.3	538.3	57.3	638.3	57.3	738.3	57.3	838.3	57.3
31°	31°	427.5	82	527.5	82	627.5	82	727.5	82	827.5	82
45°	45°	403.9	115.4	503.9	115.4	603.9	115.4	703.9	115.4	803.9	115.4

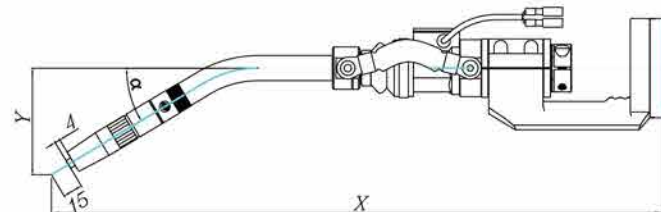


ARS02350 Different length of neck
ARS02350 不同长度颈 TCP 参数

L 长度		Standard 标准		+100L		+200L		+300L		+400L	
ANC 角度	α	X	Y	X	Y	X	Y	X	Y	X	Y
0°	10°	437.7	81.3	536.1	63.9	634.6	46.6	733.1	29.2	831.6	11.9
22°	32°	417.1	26.7	515.6	9.4	614.1	-8	712.6	-25.4	811	-42
31°	41°	402.1	4.4	500.6	-13	599.1	-30.4	697.6	-47.7	796.1	-65
45°	55°	373.1	-24.5	471.6	-41.9	570.1	-59.3	668.5	-76.6	767	-94

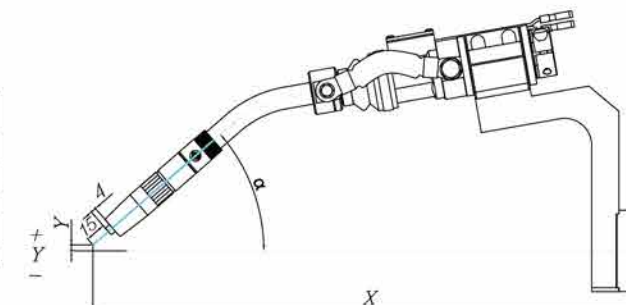


ARH01500 Different length of neck
ARH01500 不同长度颈 TCP 参数

ANC 角度		L 长度		Standard 标准		+100L		+200L		+300L		+400L	
倾斜角度 α		X	Y	X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	463.1	0	563.1	0	663.1	0	763.1	0	863.1	0		
22°	22°	451.3	62.6	551.3	62.6	651.3	62.6	751.3	62.6	851.3	62.6		
31°	31°	439.5	89.2	539.5	89.2	639.5	89.2	739.5	89.2	839.5	89.2		
45°	45°	413.8	125.3	513.8	125.3	613.8	125.3	713.8	125.3	813.8	125.3		

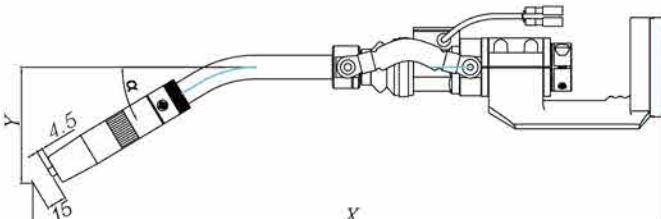


ARS02500 Different length of neck
ARS02500 不同长度颈 TCP 参数

ANC 角度		L 长度	Standard 标准		+100L		+200L		+300L		+400L	
倾斜角度 α			X	Y	X	Y	X	Y	X	Y	X	Y
0°	10°		451.3	78.9	549.8	61.5	648.3	44.2	746.8	26.8	845.3	-9.4
22°	32°		429	19.3	527.5	1.9	625.9	-15.4	724.4	-32.8	822.9	-60.2
31°	41°		412.7	-4.8	511.2	-22.2	609.7	-39.6	708.1	-56.9	806.6	-74.3
45°	55°		381.1	-36	479.6	-53.4	578.1	-70.7	676.6	-88.1	775.1	-105.5

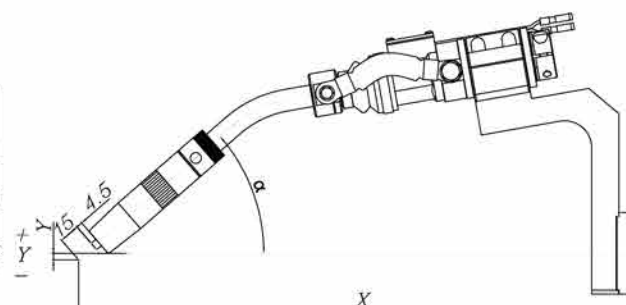


ARH01150N Different length of neck
ARH01150N 不同长度颈 TCP 参数

ANG ^L 长度 角度		Standard 标准		+100L		+200L		+300L		+400L	
倾斜角度 α		X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	390	0	490	0	590	0	690	0	790	0
45°	45°	372.2	46.7	472.2	46.7	572.2	46.7	672.2	46.7	772.2	46.7

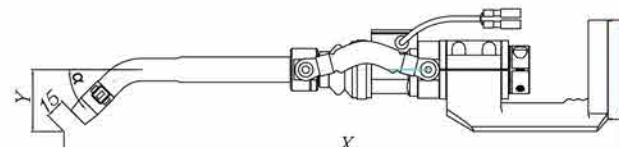


ARS02150N Different length of neck
ARS02150N 不同长度颈 TCP 参数

ANC 角度		L 长度	Standard 标准		+100L		+200L		+300L		+400L	
倾斜角度	α		X	Y	X	Y	X	Y	X	Y	X	Y
0°	10°		426.3	83.3	524.8	65.9	623.3	48.6	721.8	31.2	820.3	13.9
45°	55°		401.3	39.5	499.8	22.2	593.3	4.8	696.7	-12.5	795.2	-29.9

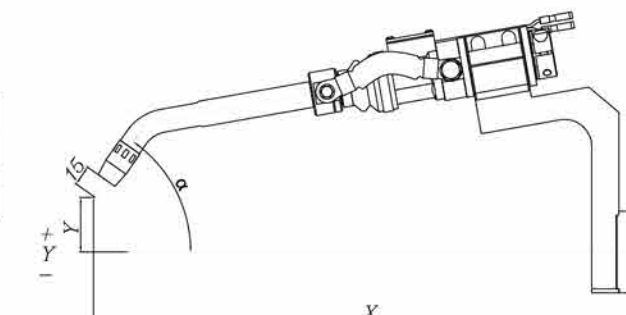


ARH01300N Different length of neck
ARH01300N 不同长度颈 TCP 参数

L 长度		Standard 标准				+100L		+200L		+300L		+400L	
ANC 角度	角度 α	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y
	0°	0	399.5	0	499.5	0	599.5	0	699.5	0	799.5	0	899.5
	45°	45°	372.6	70.2	472.6	70.2	572.6	70.2	672.6	70.2	772.6	70.2	872.6

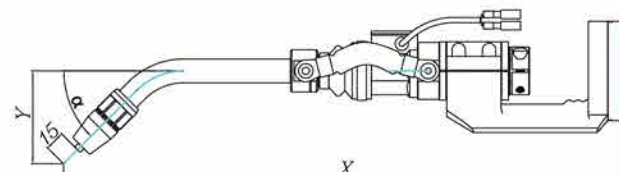

ARS02300N Different length of neck
ARS02300N 不同长度颈 TCP 参数

L 长度		Standard 标准		+100L		+200L		+300L		+400L	
ANC 角度	角度 α	X	Y	X	Y	X	Y	X	Y	X	Y
0°	10°	434.2	81.9	532.7	64.6	631.2	47.2	729.7	29.8	828.1	12.5
45°	55°	396.2	18.5	494.6	1.1	593.1	-16.3	691.6	-33.6	790.1	-51.1

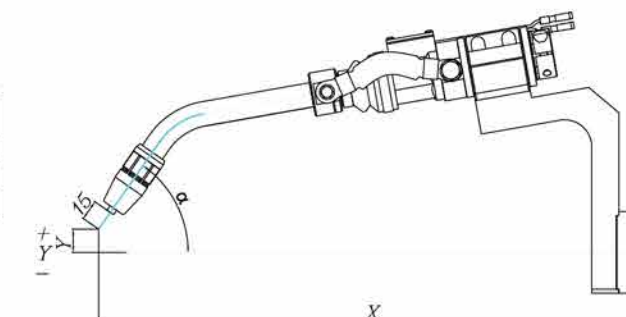

* Mark: Std. configuration 标准配置

* Mark: Std. configuration 标准配置

AS02350/AS02500
MIG Torch Air Robo
MIG 机器人焊枪 空冷 外置式



	350	500
Rating 额定电流 (MIG)	350A	500A
Rating 额定电流 (MAG)	300A	400A
Duty cycle 使用率	60%	50%
Wire Ø 适用焊丝	0.6~1.2	1.2~1.6




* Mark: Std. configuration 标准配置

AS03350/AS03P350
AS03500/AS03P500
MIG Torch Air Robo
MIG 机器人焊枪 空冷 外置式






	350	500
Rating 额定电流 (MIG)	350A	500A
Rating 额定电流 (MAG)	300A	400A
Duty cycle 使用率	60%	50%
Wire Ø 适用焊丝	0.6~1.2	1.2~1.6

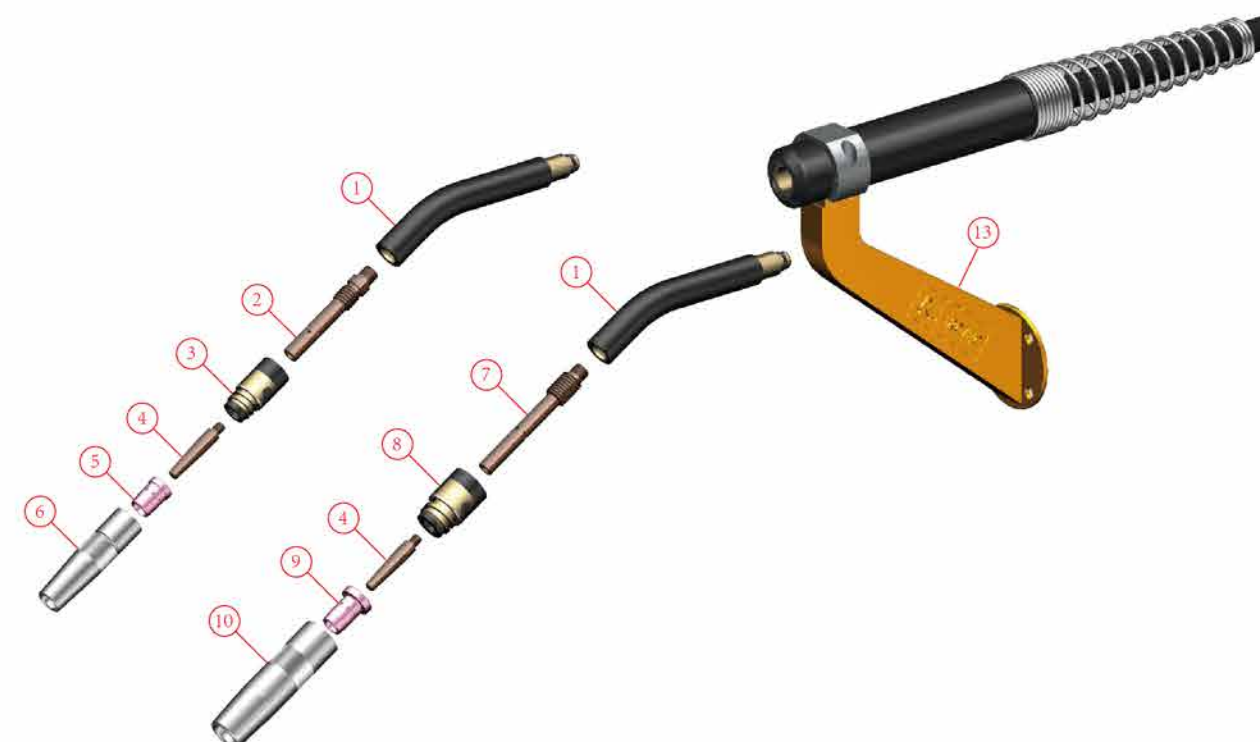

* Mark: Std. configuration 标准配置

350 Parts 350 鹅颈及配件

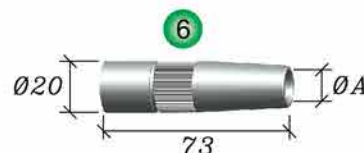

Neck 鹅颈

CODE	DESCRIPTION
BU-20050	Neck 180Dg 350/500
BU-20040	Neck 22Dg 350/500
*BU-20020	Neck 31Dg 350/500
BU-20030	Neck 45Dg 350/500

Tip holder 导电嘴座

CODE	DESCRIPTION
BG-01405	CuCrZr M10*M6*74.5L

Insulator 绝缘筒

CODE	DESCRIPTION
BG-01000	Insulator 350A

Tip 导电嘴

CODE	DESCRIPTION
*BG-05801A	CuCrZr 0.8
*BG-05803A	CuCrZr 1.0
*BG-05804A	CuCrZr 1.2
BG-05805A	CuCrZr 1.6
BG-05871	CuCrZr 0.8 Alu
BG-05873	CuCrZr 1.0 Alu
BG-05874	CuCrZr 1.2 Alu
BG-05876	CuCrZr 1.6 Alu

Tip-Thin type 导电嘴-细径

CODE	DESCRIPTION
BG-05401	CuCrZr 0.8
BG-05403	CuCrZr 1.0
BG-05404	CuCrZr 1.2
BG-05406	CuCrZr 1.6

Gas diffuser 分气环

CODE	DESCRIPTION
BG-01200	CER#95

Nozzle 火口



CODE	DESCRIPTION
*BU-00500	A=13
BU-00600	A=16

Nozzle-Thin type 火口-细径

CODE	DESCRIPTION
BG-00836	ØA=Ø10
BG-00835	ØA=Ø12
BG-00834	ØA=Ø13

* Mark: Std. configuration 标准配置

500 Parts 500 鹅颈及配件

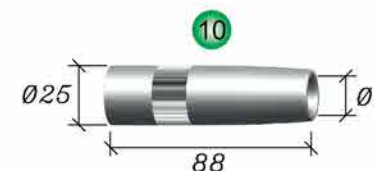

Neck 鹅颈

CODE	DESCRIPTION
BU-20050	Neck 180Dg 350/500
BU-20040	Neck 22Dg 350/500
*BU-20020	Neck 31Dg 350/500
BU-20030	Neck 45Dg 350/500

Tip holder 导电嘴座

CODE	DESCRIPTION
BG-01508	CuCrZr M10*M6*88.5L

Insulator 绝缘筒

CODE	DESCRIPTION
BG-01100	Insulator 500A

Tip 导电嘴

CODE	DESCRIPTION
*BG-05801A	CuCrZr 0.8
*BG-05803A	CuCrZr 1.0
*BG-05804A	CuCrZr 1.2
BG-05805A	CuCrZr 1.6
BG-05871	CuCrZr 0.8 Alu
BG-05873	CuCrZr 1.0 Alu
BG-05874	CuCrZr 1.2 Alu
BG-05876	CuCrZr 1.6 Alu

Gas diffuser 分气环

CODE	DESCRIPTION
BG-01300	CER#95

Nozzle 火口

CODE	DESCRIPTION
*BG-00700	A=16
BG-00800	A=19

* Mark: Std. configuration 标准配置

Bracket and flange 支架组及法兰组



11

Bracket assy 支架组

CODE	DESCRIPTION
BU-36035	Bracket 26 AS02



12

Flange adpt 法兰组

CODE	DESCRIPTION
	Flange AS02



13

Bracket assy 支架组

CODE	DESCRIPTION
BU-36060	Iron orange 26 AS03
BU-36061	Iron orange 26 AS03P




14

Bracket extender 支架延长杆 (选配)

CODE	DESCRIPTION
BU-36070	Bracket extender orange 100L AS03

Power Cable Assy. 电缆总成 空冷

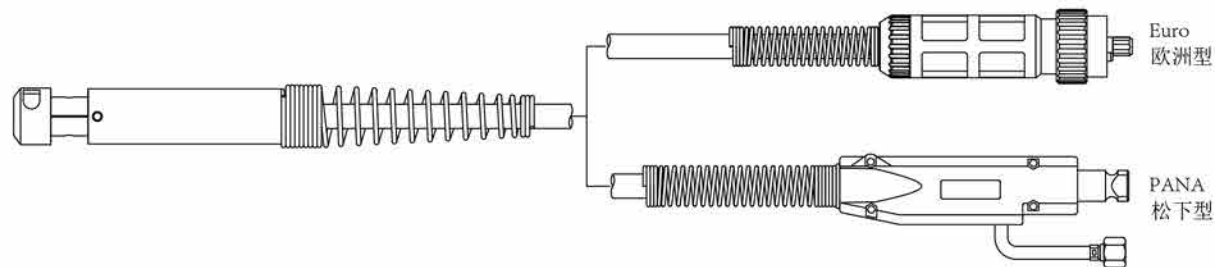


*连接送丝机接口有Euro, PANA, OTC, Lincoln.....等

* Mark: Std. configuration 标准配置

AS02 支架TCP参数


AS02350 Different length of neck
AS02350 不同长度鹅颈TCP参数

L 长度		Standard 标准		+100L		+200L		+300L		+400L	
ANG 角度	α	X	Y	X	Y	X	Y	X	Y	X	Y
鹅颈角度											
0°	14°	396.1	73.8	493.1	49.6	590.2	25.4	687.2	1.2	784.2	-23
31°	45°	356	0.8	453.1	-23.4	550.1	-47.5	647.1	-71.7	744.1	-95.9
45°	59°	325.1	-30.7	422.1	-54.8	519.1	-79	616.2	-103.2	713.2	-127.4

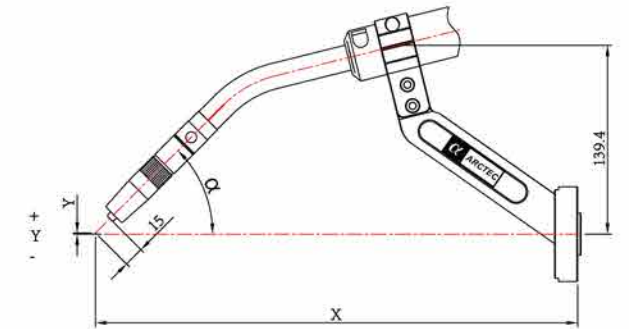

AS02500 Different length of neck
AS02500 不同长度鹅颈TCP参数

L 长度		Standard 标准		+100L		+200L		+300L		+400L	
ANG 角度	α	X	Y	X	Y	X	Y	X	Y	X	Y
0°	14°	409.7	70.4	506.7	46.2	603.7	22	700.8	-2.1	797.8	-26.3
31°	45°	365.9	-9.1	463	-33.3	560	-57.4	657	-81.6	754.1	-105.8
45°	59°	332.3	-42.7	429.3	-66.8	526.3	-91	623.4	-115.2	720.4	-139.4

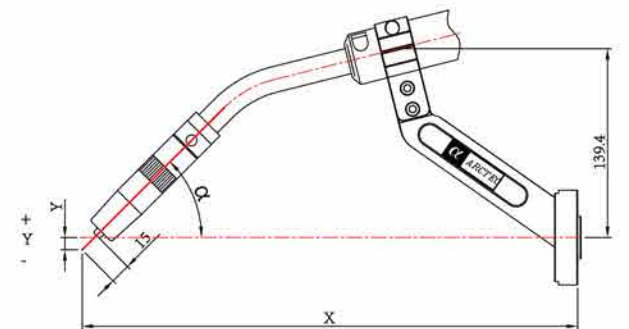


* Mark: Std. configuration 标准配置

AS03 支架TCP参数


AS03350 Different length of neck
AS03350 不同长度鹅颈TCP参数

长度 L 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	14°	403.4	93.4	500.4	69.3	597.5	45.1	694.5	20.9
31°	45°	363.3	20.5	460.4	-3.7	557.4	-27.9	654.4	-52.1
45°	59°	332.4	-11	429.4	-35.2	526.4	-59.4	623.4	-83.6

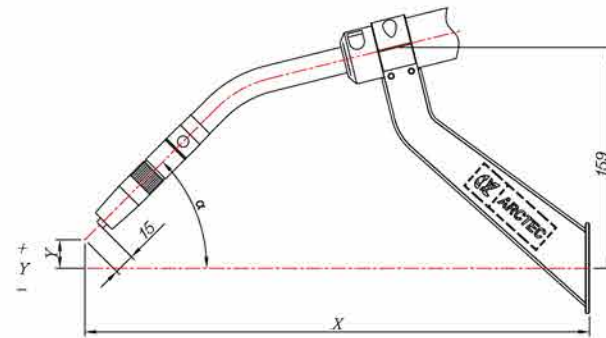


AS03P350 Different length of neck
AS03P350 不同长度鹅颈TCP参数

长度 L 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	0°	413.1	159.5	513.1	159.5	613.1	159.5	713.1	159.5
31°	31°	391.9	79	491.9	79	591.9	79	691.9	79
45°	45°	369.4	40.9	469.4	40.9	569.4	40.9	669.4	40.9

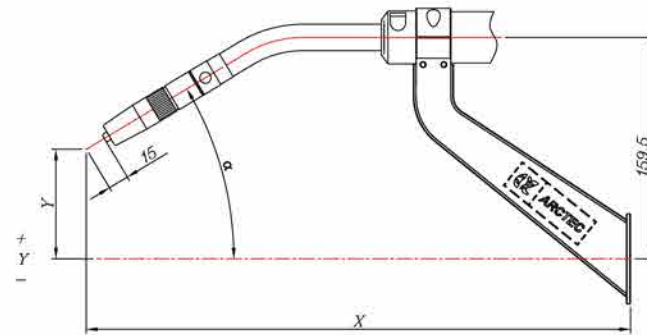


AS03500 Different length of neck
AS03500 不同长度鹅颈TCP参数

长度 L 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	14°	417	90.1	514	65.9	611	41.7	708.1	17.5
31°	45°	373.2	10.6	470.3	-13.6	567.3	-37.8	664.3	-62
45°	59°	339.6	-23	436.6	-47.2	533.6	-71.4	630.7	-95.6

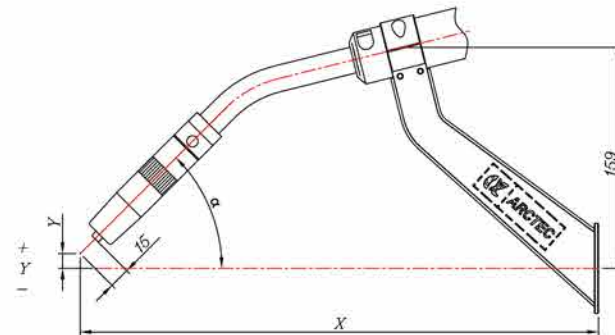

AS03P500 Different length of neck
AS03P500 不同长度鹅颈TCP参数

长度 L 角度 α	Standard 标准	+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y
0°	0°	427.1	159.5	527.1	159.5	627.1	159.5	727.1	159.5
31°	31°	403.9	71.8	503.9	71.8	603.9	71.8	703.9	71.8
45°	45°	379.3	31	479.3	31	579.3	31	679.3	31

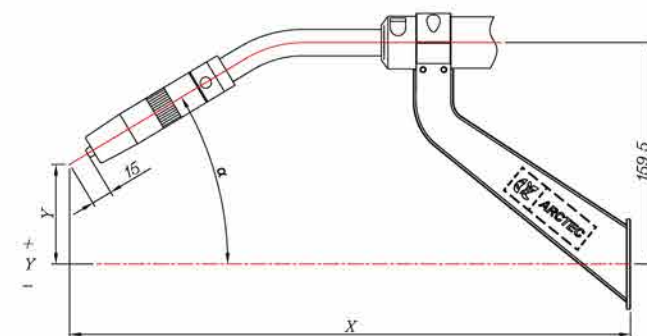

* Mark: Std. configuration 标准配置

ARH18301W/ARH18501W/ARH18651W

MIG Torch Water Robo Hollowrist

MIG 机器人焊枪 水冷 内置式



	301W	501W	651W
Rating 额定电流 (MIG)	300A	500A	650A
Rating 额定电流 (MAG)	250A	450A	600A
Duty cycle 使用率	100%	100%	100%
Wire Ø 适用焊丝	0.8~1.2	0.8~1.6	0.8~1.6



Shock Sensor ARH18xx1W Technical data(IEC60974-7)	
碰撞传感器ARH18xx1W技术参数	
Max.deflection 最大偏移量	11°
Triggering the emergency-off switch (X&Y plane) 即时止动 (X&Y轴)	1.3°
Resetting accuracy 可重复性	TCP回位精度 横向误差在 ±0.2mm (法兰盘起300mm长)
Rotation Limited 旋转范围	零点 (中间) 位置起 ±220°

* Mark: Std. configuration 标准配置

ARS08301W/ARS08501W/ARS08651W

MIG Torch Water Robo

MIG 机器人焊枪 水冷 外置式




	301W	501W	651W
Rating 额定电流 (MIG)	300A	500A	650A
Rating 额定电流 (MAG)	250A	450A	600A
Duty cycle 使用率	100%	100%	100%
Wire Ø 适用焊丝	0.8~1.2	0.8~1.6	0.8~1.6



Shock Sensor ARS08 Technical data(IEC60974-7)	
碰撞传感器ARS08技术参数	
Max.deflection 最大偏移量	10°
Triggering the emergency-off switch (X&Y plane) 即时止动 (X&Y轴)	1.2°~1.5°
Resetting accuracy 可重复性	TCP回位精度 横向误差在 ±0.2mm (法兰盘起300mm长)

* Mark: Std. configuration 标准配置

301W Parts 301W 鹅颈及配件

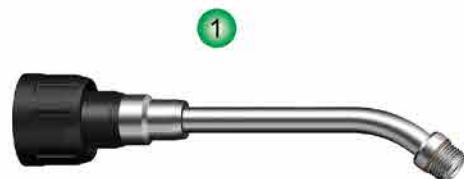


Neck 鹅颈

CODE	DESCRIPTION
BU-20580	Neck 180Dg Water
BU-20581	Neck 22Dg Water
*BU-20582	Neck 36Dg Water
BU-20583	Neck 45Dg Water



Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05230	CuCrZr M10-1*M6*20L




Tip 导电嘴

CODE	DESCRIPTION
BD-76201	CuCrZr 0.8
*BD-76203	CuCrZr 1.0
*BD-76204	CuCrZr 1.2
BD-76211	CuCrZr 0.8 Alu
BD-76213	CuCrZr 1.0 Alu
BD-76214	CuCrZr 1.2 Alu



Gas diffuser 分气环

CODE	DESCRIPTION
BU-19000	Pnlc Black M10-1*12.5L



Nozzle 火口

CODE	DESCRIPTION
BU-02121	$\varnothing A = \varnothing 11$
*BU-02123	$\varnothing A = \varnothing 13$
BU-02125	$\varnothing A = \varnothing 15$

* Mark: Std. configuration 标准配置

501W Parts 501W 鹅颈及配件




Neck 鹅颈

CODE	DESCRIPTION
BU-20650	Neck 180Dg Water
BU-20651	Neck 22Dg Water
*BU-20652	Neck 36Dg Water
BU-20653	Neck 45Dg Water



Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05220	CuCrZr M10-1.25*M8*29L




Tip 导电嘴

CODE	DESCRIPTION
*BU-10243	CuCrZr 1.0
*BU-10244	CuCrZr 1.2
*BU-10246	CuCrZr 1.6
BU-10253	CuCrZr 1.0 Alu
BU-10254	CuCrZr 1.2 Alu
BU-10256	CuCrZr 1.6 Alu



Gas diffuser 分气环

CODE	DESCRIPTION
BU-19010	CER#95 White 19L

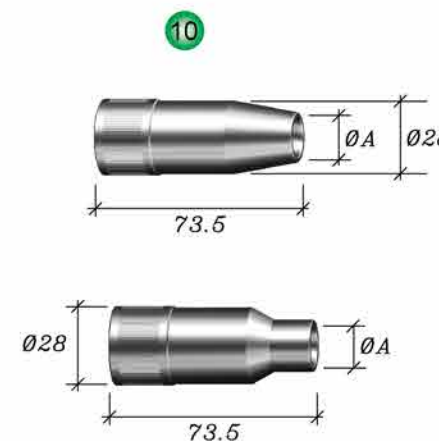

Nozzle 火口

CODE	DESCRIPTION
BU-02102	$\varnothing A = 15$
*BU-02105	$\varnothing A = 18$
BU-02108	$\varnothing A = 21$

Nozzle-Thin type 火口-细径

CODE	DESCRIPTION
BU-021021	$\varnothing A = \varnothing 15$

* Mark: Std. configuration 标准配置

651W Parts 651W 鹅颈及配件



Neck 鹅颈

CODE	DESCRIPTION
BU-20660	Neck 180Dg Water
BU-20661	Neck 22Dg Water
*BU-20662	Neck 36Dg Water
BU-20663	Neck 45Dg Water


12



Gas diffuser 分气环

CODE	DESCRIPTION
BU-19020	Pnlc Black 18.5L

13



Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05250	CuCrZr M16-1*M12*23L

14



Tip 导电嘴

CODE	DESCRIPTION
BU-10404	CuCrZr L=45 1.2
BU-10405	CuCrZr L=45 1.4
BU-10406	CuCrZr L=45 1.6
BU-10407	CuCrZr L=45 2.0
BU-10414	CuCrZr L=45 1.2 Alu
BU-10415	CuCrZr L=45 1.4 Alu
BU-10416	CuCrZr L=45 1.6 Alu
BU-10417	CuCrZr L=45 2.0 Alu

15



Nozzle 火口

CODE	DESCRIPTION
*BU-02200	ØA=Ø21.5 L=92
BU-02201	ØA=Ø18 L=92
BU-02202	ØA=Ø21.5 L=86
BU-02203	ØA=Ø21.5 L=95

* Mark: Std. configuration 标准配置

Shock sensor and Flange 碰撞传感器及法兰组

16



Shock sensor 碰撞传感器

CODE	DESCRIPTION
BU-30260	Shock sensor ARH18xx1W

16



Shock sensor 碰撞传感器 夹丝

CODE	DESCRIPTION
BU-30265	Shock sensor with wire braker ARH18xx1W-CP


17



Flange adpt 法兰组

CODE	DESCRIPTION
	Flange ARH18

Power Cable Assy. 电缆总成 水冷

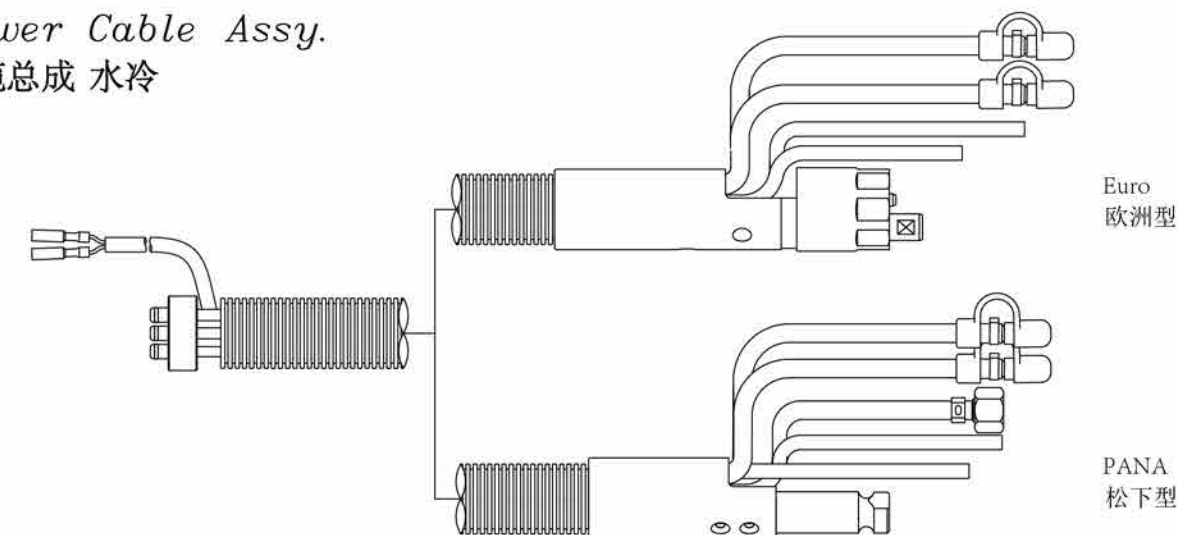

*连接送丝机接口有Euro, PANA, OTC, Lincoln.....等

* Mark: Std. configuration 标准配置

Shock sensor, bracket and flange

碰撞传感器、支架组及法兰组

18



Neck support 本体支撑座

CODE	DESCRIPTION
BU-08065	Neck support ARS08xx1W

19



Bracket assy 支架组

CODE	DESCRIPTION
BU-35691	Bracket assy ARS08xx1W
BU-35692	Bracket assy ARS08xx1W-CP

20



Shock sensor 碰撞传感器

CODE	DESCRIPTION
BU-30800	Shock sensor ARS08

21




Flange adpt 法兰组

CODE	DESCRIPTION
	Flange ARS08

Power Cable Assy.

电缆总成 水冷

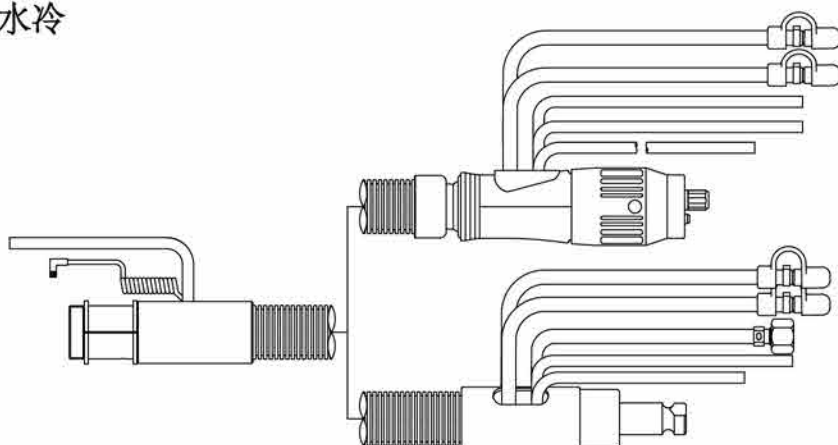

Euro
欧洲型


PANA
松下型

*连接送丝机接口有Euro, PANA, OTC, Lincoln.....等

* Mark: Std. configuration 标准配置


ARH18301W Different length of neck
ARH18301W 不同长度鹅颈TCP参数

ARC 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	461.2	0	561.2	0	661.2	0	761.2	0	861.2	0
22°	22°	455.5	29.2	555.5	29.2	655.5	29.2	755.5	29.2	855.5	29.2
36°	36°	446.1	49.3	546.1	49.3	646.1	49.3	746.1	49.3	846.1	49.3
45°	45°	437.4	62.1	537.4	62.1	637.4	62.1	737.4	62.1	837.4	62.1

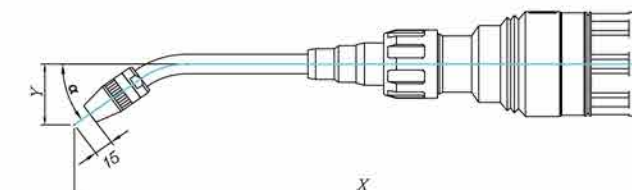


ARH18501W Different length of neck
ARH18501W 不同长度鹅颈TCP参数

ARC 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	518.5	0	618.5	0	718.5	0	818.5	0	918.5	0
22°	22°	609.2	49.5	709.2	49.5	809.2	49.5	909.2	49.5	1009.2	49.5
36°	36°	493	83	593	83	693	83	793	83	893	83
45°	45°	478.3	104.3	578.3	104.3	678.3	104.3	778.3	104.3	878.3	104.3

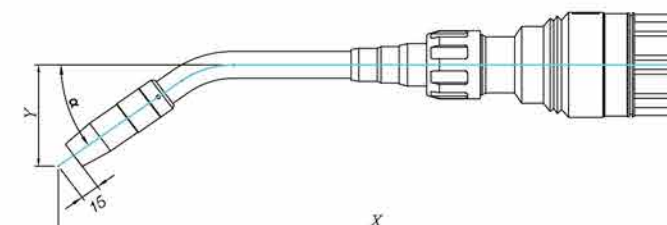

ARH18651W Different length of neck
ARH18651W 不同长度鹅颈TCP参数

ARC 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	521.2	0	621.2	0	721.2	0	821.2	0	921.2	0
22°	22°	510.3	53	610.3	53	710.3	53	810.3	53	910.3	53
35°	35°	494.8	87.7	594.8	87.7	694.8	87.7	794.8	87.7	894.8	87.7
45°	45°	477.5	114.7	577.5	114.7	677.5	114.7	777.5	114.7	877.5	114.7

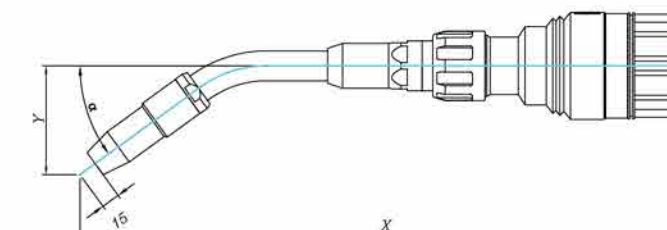


* Mark: Std. configuration 标准配置

ARS08301W Different length of neck

ARS08301W 不同长度颈 TCP 参数


ARC 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	9°	568.8	77.6	667.6	61.9	766.3	46.3	865.1	30.7	963.9	15
22°	31°	551.9	30.2	650.6	14.5	749.4	-11	848.2	-16.8	947	-32.4
36°	45°	530.6	-0.4	629.4	-16.1	828.2	-31.7	827	-47.4	925.7	-63
45°	54°	512.8	-19.1	611.6	-34.8	710.3	-50.4	809.1	-66.1	907.9	-81.7

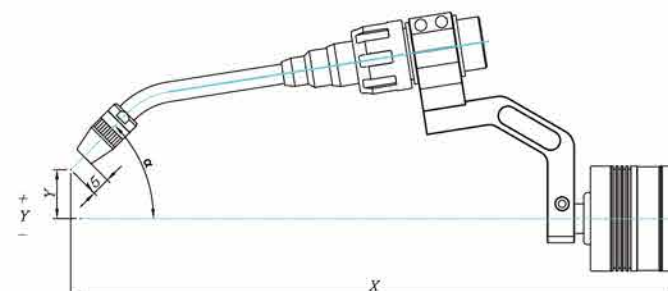

ARS08501W Different length of neck

ARS08501W 不同长度颈 TCP 参数


ARC 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	9°	568.8	77.6	667.6	61.9	766.3	46.3	865.1	30.7	963.9	15
22°	31°	551.9	30.2	650.6	14.5	749.4	-11	848.2	-16.8	947	-32.4
36°	45°	530.6	-0.4	629.4	-16.1	828.2	-31.7	827	-47.4	925.7	-63
45°	54°	512.8	-19.1	611.6	-34.8	710.3	-50.4	809.1	-66.1	907.9	-81.7

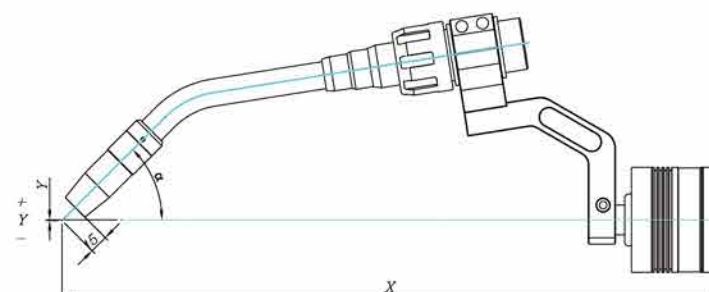

ARS08651W Different length of neck

ARS08651W 不同长度颈 TCP 参数

ARC 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	9°	571.5	77.2	670.2	61.5	769	45.9	867.8	30.2	966.5	14.6
22°	31°	552.4	26.5	651.2	10.9	750	-4.8	848.7	-20.4	947.5	-36.1
35°	44°	531.7	-5.3	630.5	-21	729.2	-36.6	828	-52.3	926.8	-67.9
45°	54°	510.4	-29.3	609.2	-45	707.9	-60.6	806.7	-76.3	905.5	-91.9

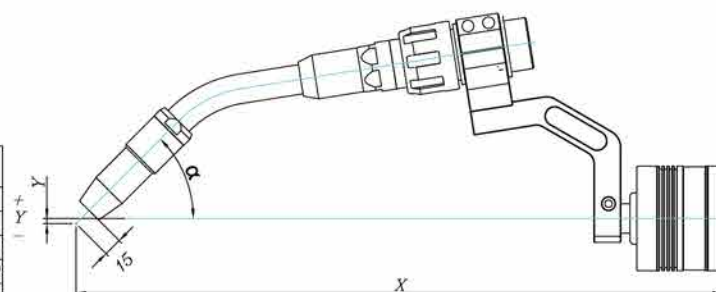

* Mark: Std. configuration 标准配置

AS02301W/AS02501W/AS02651W
MIG Torch Water Robo
MIG 机器人焊枪 水冷 外置式



	301W	501W	651W
Rating 额定电流 (MIG)	300A	500A	650A
Rating 额定电流 (MAG)	250A	450A	600A
Duty cycle 使用率	100%	100%	100%
Wire Ø 适用焊丝	0.8~1.2	0.8~1.6	0.8~1.6




* Mark: Std. configuration 标准配置

AS03301W/AS03P301W
AS03501W/AS03P501W
AS03651W/AS03P651W
MIG Torch Water Robo
MIG 机器人焊枪 水冷 外置式




	301W	501W	651W
Rating 额定电流 (MIG)	300A	500A	650A
Rating 额定电流 (MAG)	250A	450A	600A
Duty cycle 使用率	100%	100%	100%
Wire Ø 适用焊丝	0.8~1.2	0.8~1.6	0.8~1.6

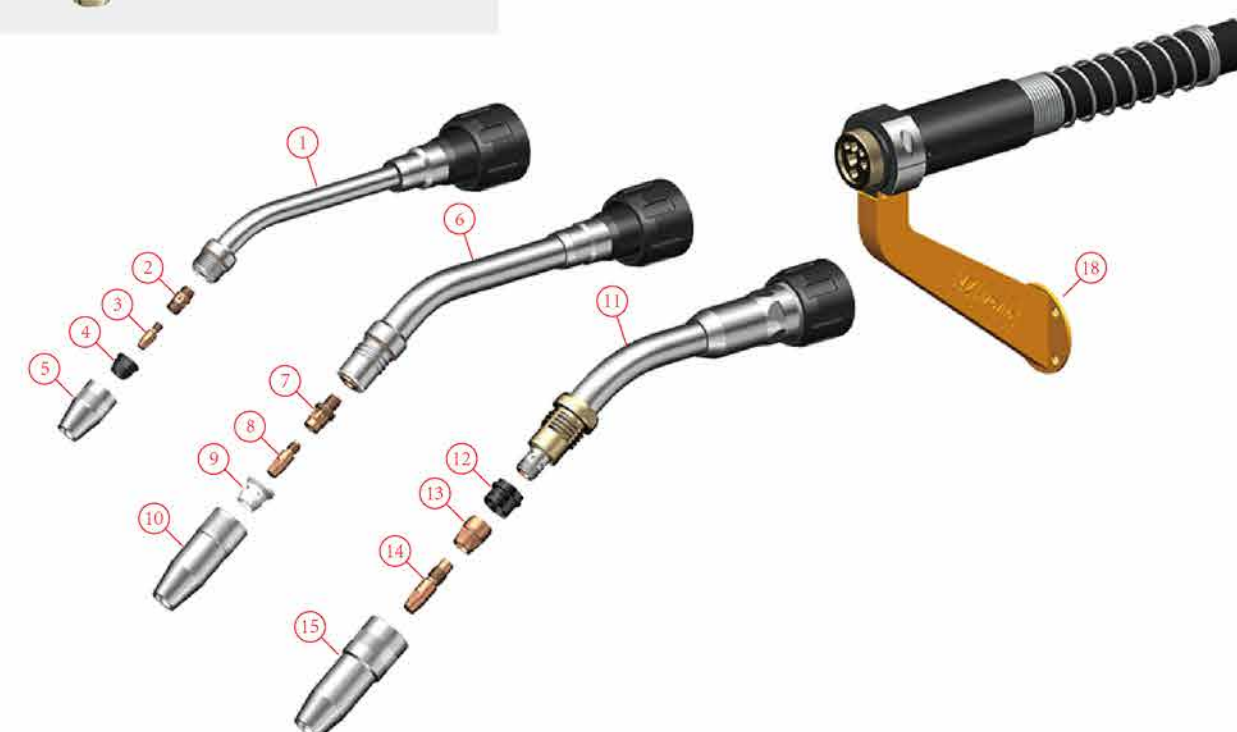

* Mark: Std. configuration 标准配置

301W Parts 301W 鹅颈及配件

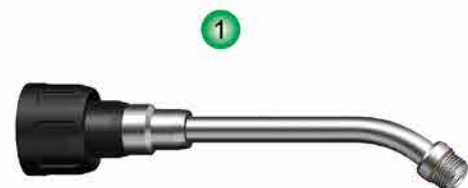


Neck 鹅颈

CODE	DESCRIPTION
BU-20580	Neck 180Dg Water
BU-20581	Neck 22Dg Water
*BU-20582	Neck 36Dg Water
BU-20583	Neck 45Dg Water



Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05230	CuCr M10-1*M6*20L




Tip 导电嘴

CODE	DESCRIPTION
BD-76201	CuCrZr 0.8
*BD-76203	CuCrZr 1.0
*BD-76204	CuCrZr 1.2
BD-76211	CuCrZr 0.8 Alu
BD-76213	CuCrZr 1.0 Alu
BD-76214	CuCrZr 1.2 Alu



Gas diffuser 分气环

CODE	DESCRIPTION
BU-19000	Pnlc Black M10-1*12.5L



Nozzle 火口

CODE	DESCRIPTION
BU-02121	$\varnothing A = \varnothing 11$
*BU-02123	$\varnothing A = \varnothing 13$
BU-02125	$\varnothing A = \varnothing 15$

* Mark: Std. configuration 标准配置

501W Parts 501W 鹅颈及配件




Neck 鹅颈

CODE	DESCRIPTION
BU-20650	Neck 180Dg Water
BU-20651	Neck 22Dg Water
*BU-20652	Neck 36Dg Water
BU-20653	Neck 45Dg Water



Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05220	CuCrZr M10-1.25*M8*29L




Tip 导电嘴

CODE	DESCRIPTION
*BU-10243	CuCrZr 1.0
*BU-10244	CuCrZr 1.2
*BU-10246	CuCrZr 1.6
BU-10253	CuCrZr 1.0 Alu
BU-10254	CuCrZr 1.2 Alu
BU-10256	CuCrZr 1.6 Alu



Gas diffuser 分气环

CODE	DESCRIPTION
BU-19010	CER#95 White 19L

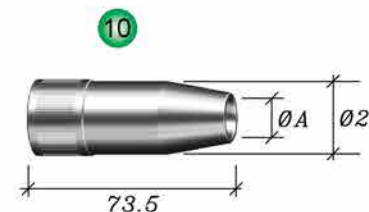

Nozzle 火口

CODE	DESCRIPTION
BU-02102	$\varnothing A = 15$
*BU-02105	$\varnothing A = 18$
BU-02108	$\varnothing A = 21$



Nozzle-Thin type 火口-细径

CODE	DESCRIPTION
BU-021021	$\varnothing A = \varnothing 15$

* Mark: Std. configuration 标准配置

651W Parts 651W 鹅颈及配件



Neck 鹅颈

CODE	DESCRIPTION
BU-20660	Neck 180Dg Water
BU-20661	Neck 22Dg Water
*BU-20662	Neck 36Dg Water
BU-20663	Neck 45Dg Water


12



Gas diffuser 分气环

CODE	DESCRIPTION
BU-19020	Pnlc Black 18.5L

13



Tip holder 导电嘴座

CODE	DESCRIPTION
BU-05250	CuCrZr M16-1*M12*23L

14



Tip 导电嘴

CODE	DESCRIPTION
BU-10404	CuCrZr L=45 1.2
BU-10405	CuCrZr L=45 1.4
BU-10406	CuCrZr L=45 1.6
BU-10407	CuCrZr L=45 2.0
BU-10414	CuCrZr L=45 1.2 Alu
BU-10415	CuCrZr L=45 1.4 Alu
BU-10416	CuCrZr L=45 1.6 Alu
BU-10417	CuCrZr L=45 2.0 Alu

15



Nozzle 火口

CODE	DESCRIPTION
*BU-02200	ØA=Ø21.5 L=92
BU-02201	ØA=Ø18 L=92
BU-02202	ØA=Ø21.5 L=86
BU-02203	ØA=Ø21.5 L=95

* Mark: Std. configuration 标准配置

Bracket and flange 支架组及法兰组



16

17



18



19



Bracket assy 支架组

CODE	DESCRIPTION
BU-36036	Bracket 42 AS02

Flange adpt 法兰组

CODE	DESCRIPTION
	Flange AS02


Bracket assy 支架组

CODE	DESCRIPTION
BU-36065	Iron orange 42 AS03
BU-36066	Iron orange 42 AS03P

Bracket extender 支架延长杆 (选配)

CODE	DESCRIPTION
BU-36070	Bracket extenter orange 100L AS03

Power Cable Assy. 电缆总成 水冷

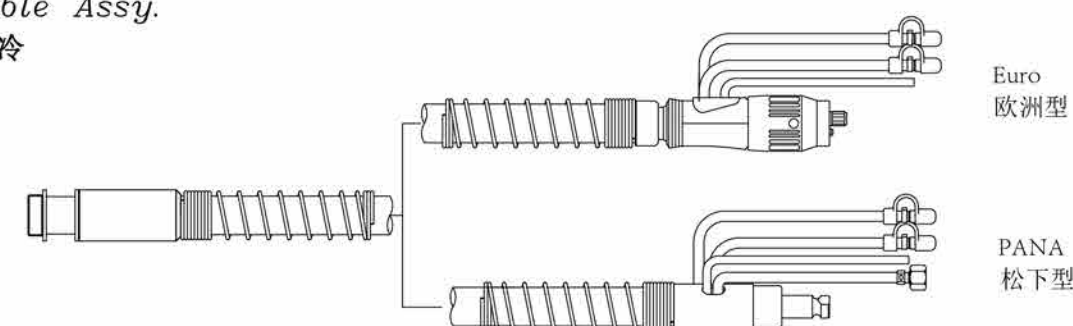


*连接送丝机接口有Euro, PANA, OTC, Lincoln.....等

* Mark: Std. configuration 标准配置

AS02支架TCP参数

AS02301W Different length of neck
AS02301W 不同长度鹅颈TCP参数


ANZ 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	14°	449.1	90.4	546.1	66.2	643.1	42.1	740.2	17.9	837.2	-6.3
22°	36°	437	63.8	534	39.6	631	15.4	728.1	-8.8	825.1	-33
36°	50°	422.7	45.7	519.7	21.5	616.8	-2.7	713.8	-26.9	810.8	-51.1
45°	59°	410.6	34.4	507.6	10.2	604.7	-14	701.7	-38.2	798.7	-62.4

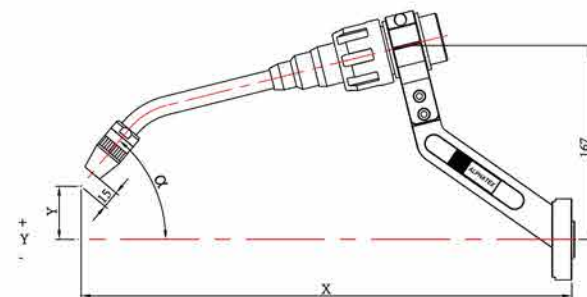

AS03支架TCP参数


AS03301W Different length of neck
AS03301W 不同长度鹅颈TCP参数

ANZ 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	14°	449.2	90.2	546.3	66.1	643.3	41.9	740.3	17.1	837.4	-6.5
22°	36°	437.1	63.6	534.1	39.4	631.2	15.2	728.2	-9	825.2	-33.2
36°	50°	422.8	45.5	519.9	21.3	616.9	-2.9	713.9	-27.1	811	-51.2
45°	59°	410.7	34.2	507.8	10	604.8	-14.2	701.8	-38.4	798.9	-62.6

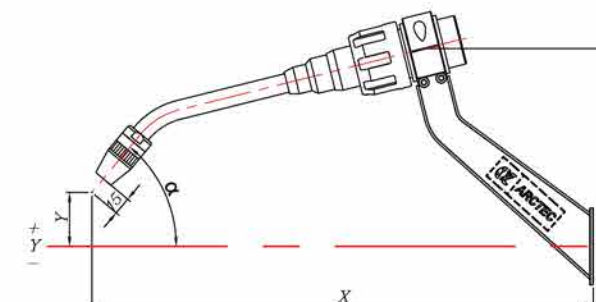


AS02501W Different length of neck
AS02501W 不同长度鹅颈TCP参数

ANZ 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	14°	455.7	88.8	504.2	76.7	601.2	52.5	698.3	28.3	795.3	4.1
22°	36°	434.7	43	483.2	30.9	580.3	6.7	677.3	-17.5	774.3	-41.7
36°	50°	410.9	14.4	459.4	2.3	556.4	-21.9	653.5	-46.1	750.5	-70.3
45°	59°	391.5	-2.7	440	-14.8	537	-39	634	-63.2	731.1	-87.4

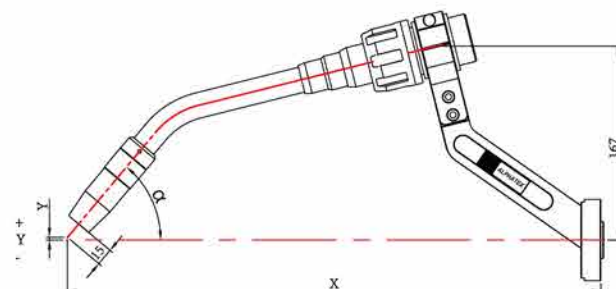


AS03501W Different length of neck
AS03501W 不同长度鹅颈TCP参数

ANZ 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	14°	455.8	88.6	504.3	76.5	601.4	52.3	698.4	28.1	795.4	3.9
22°	36°	434.9	42.8	483.4	30.7	580.4	6.5	677.4	-17.7	774.5	-41.8
36°	50°	411	14.2	459.6	2.1	556.6	-22.1	653.6	-46.3	750.6	-70.5
45°	59°	391.6	-2.9	440.1	-15	537.2	-39.2	634.2	-63.4	731.2	-87.5

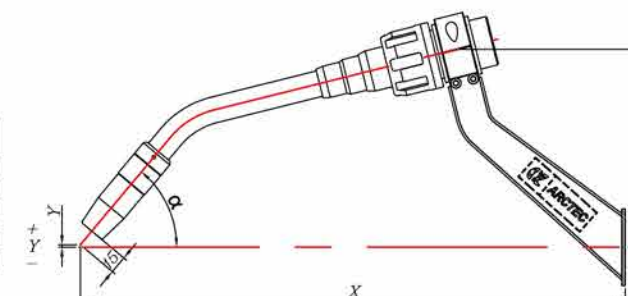


AS02651W Different length of neck
AS02651W 不同长度鹅颈TCP参数

ANZ 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	14°	506.8	76	603.9	51.9	700.9	27.7	797.9	3.5	894.9	-20.7
22°	36°	483.4	27.2	580.5	3.1	677.5	-21.1	774.5	-45.3	871.6	-69.5
35°	49°	460	-2.7	557	-26.9	654.1	-51	751.1	-75.2	848.1	-99.4
45°	59°	436.7	-24.7	533.7	-48.9	630.8	-73.1	727.8	-97.3	824.8	-121.5

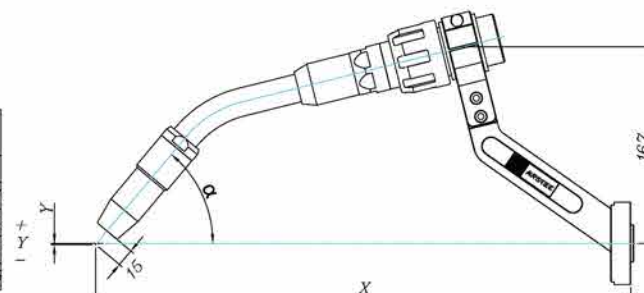

AS03651W Different length of neck
AS03651W 不同长度鹅颈TCP参数

ANZ 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	14°	507	76	604	51.9	701	27.7	798.1	3.5	895.1	-20.7
22°	36°	483.6	27.2	580.6	3.1	677.7	-21.1	774.7	-45.3	871.7	-69.5
35°	49°	460.2	-2.7	557.2	-26.9	654.2	-51	751.3	-75.2	848.3	-99.4
45°	59°	436.8	-24.7	533.9	-48.9	630.9	-73.1	727.9	-97.3	825	-121.5

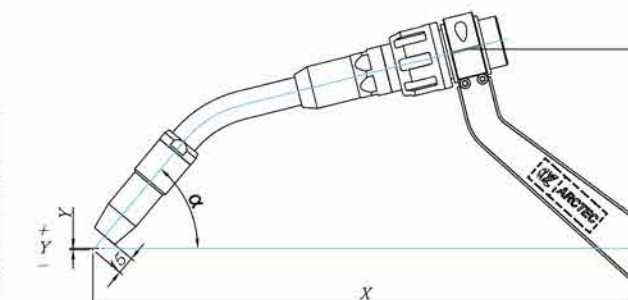


* Mark: Std. configuration 标准配置

* Mark: Std. configuration 标准配置

AS03P支架TCP参数


AS03P301W Different length of neck
AS03P301W 不同长度鹅颈TCP参数

Angle 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	458.3	167.5	558.3	167.5	658.3	167.5	758.3	167.5	858.3	167.5
22°	22°	453	138.5	553	138.5	653	138.5	753	138.5	853	138.5
36°	36°	443.5	117.7	543.5	117.7	643.5	117.7	743.5	117.7	843.5	117.7
45°	45°	434.5	103.8	534.5	103.8	634.5	103.8	734.5	103.8	834.5	103.8

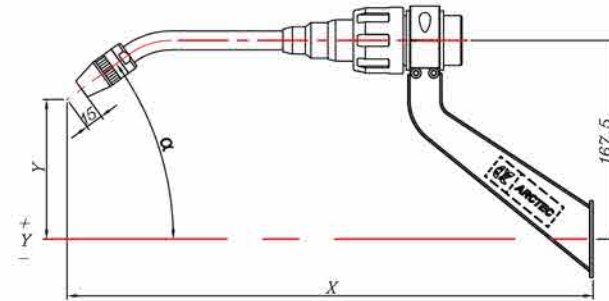


AS03P501W Different length of neck
AS03P501W 不同长度鹅颈TCP参数

Angle 角度	L 长度	-50L		Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	465.1	167.5	515.1	167.5	515.1	167.5	515.1	167.5	515.1	167.5	515.1	167.5
22°	22°	455.9	118	505.9	118	505.9	118	505.9	118	505.9	118	505.9	118
36°	36°	439.7	84.4	489.7	84.4	489.7	84.4	489.7	84.4	489.7	84.4	489.7	84.4
45°	45°	424.9	63.2	474.9	63.2	474.9	63.2	474.9	63.2	474.9	63.2	474.9	63.2

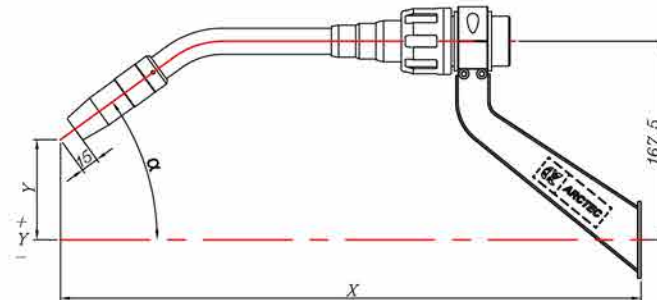

AS03P651W Different length of neck
AS03P651W 不同长度鹅颈TCP参数

Angle 角度	L 长度	Standard 标准		+100L		+200L		+300L		+400L	
		X	Y	X	Y	X	Y	X	Y	X	Y
0°	0°	517.8	167.5	617.8	167.5	717.8	167.5	817.8	167.5	917.8	167.5
22°	22°	507	114.4	607	114.4	707	114.4	807	114.4	907	114.4
35°	35°	491.5	79.8	591.5	79.8	691.5	79.8	791.5	79.8	891.5	79.8
45°	45°	474.2	52.7	574.2	52.7	674.2	52.7	774.2	52.7	874.2	52.7

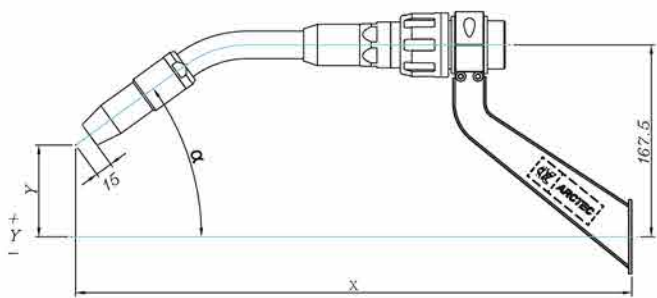

* Mark: Std. configuration 标准配置

ARS05500W-PP


MIG Torch Push Pull Water Robo
MIG 机器人焊枪 推拉式 水冷 外置式



	500W
Rating 额定电流 (MIG)	500A
Rating 额定电流 (MAG)	450A
Duty cycle 使用率	100%
Wire Ø 适用焊丝	0.8~1.6



ARS05500W-PP Different length of neck ARS055W-PP 不同长度鹅颈数据					
X ARC 角度	L 长度 Standard	+100L	+200L	+300L	+400L
0°	461.5	561.5	661.5	761.5	861.5
22°	445.2	545.2	645.2	745.2	845.2
36°	423.8	523.8	623.8	723.8	823.8
45°	406	506	606	706	806

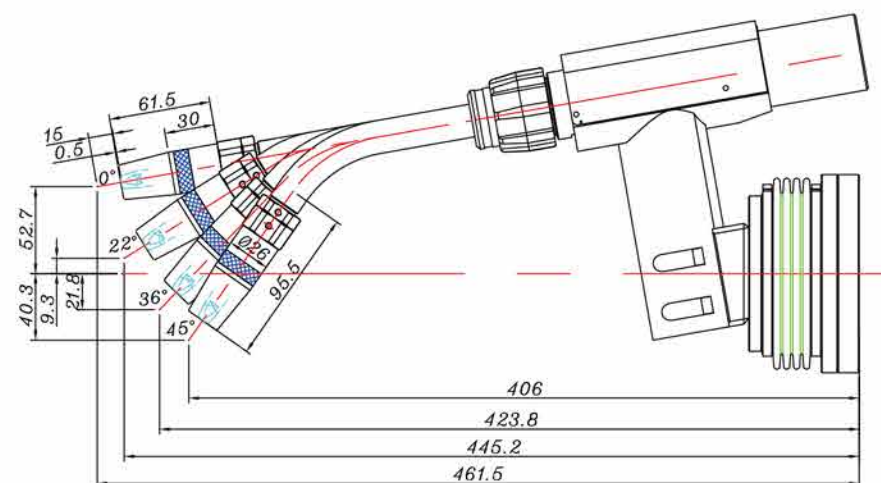


* Mark: Std. configuration 标准配置

TIG AL400P

氩焊 AL-400P 适配外置ARS01防撞器



额定电流	400A
使用率	80%
适用焊丝	0.8~1.2
冷却方式	水冷

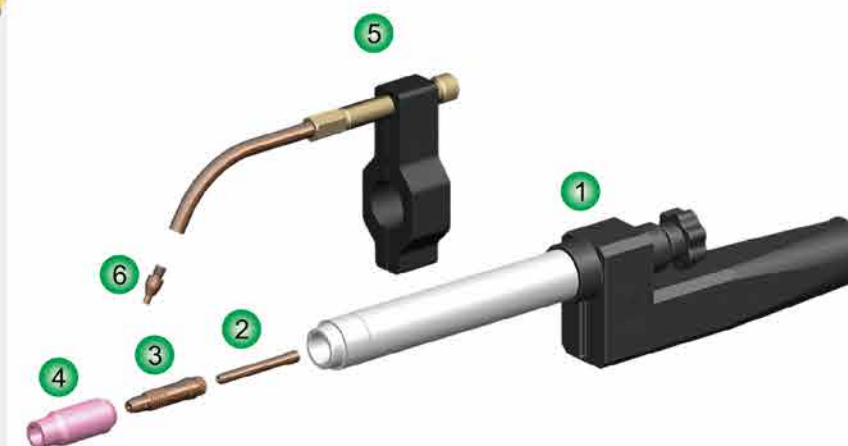

ITEM	CODE	DESCRIPTION
1	AC-36000	AL-400P Torch body for machine 直型本体
2	AP-18010	10N22 Collet 1.0 夹头
	*AP-18020	10N23 Collet 1.6 夹头
	AP-18030	10N24 Collet 2.4 夹头
	AP-18040	10N25 Collet 3.2 夹头
3	AP-18410	10N30 Collet body 1.0 夹头套
	*AP-18420	10N31 Collet body 1.6 夹头套
	AP-18430	10N32 Collet body 2.4 夹头套
	AP-18440	10N28 Collet body 3.2 夹头套
4	AN-18220	10N49 Standard nozzle #5 陶瓷火口
	*AN-18230	10N48 Standard nozzle #6 陶瓷火口
	AN-18240	10N47 Standard nozzle #7 陶瓷火口
	AN-18250	10N46 Standard nozzle #8 陶瓷火口
5	FA-01320	Tig wire feeder frame assy.w/ screws Auto 氩焊自动送丝装置组 含螺丝
6	FA-01522	Con. tip-Cu M6*8*20L*0.8 送丝嘴
	*FA-01524	Con. tip-Cu M6*8*20L*1.0 送丝嘴
	FA-01525	Con. tip-Cu M6*8*20L*1.2 送丝嘴

* Mark: Std. configuration 标准配置

Cleaning station 集成式清枪装置

AT01S



压缩空气接头 Compressed air supply outlet	G1/4"
气管内径 Hose inside diameter	至少06mm min. 06mm
标称压力 Normal pressure	6bar
工作压力 Operation pressure	6-8bar
控制电压 Control voltage	NPN (0V DC) PNP (24V DC)
单阀功耗 Power demand	2.8W
工作电压 Operation voltage	10-30V DC
电流消耗 Current consumption	约4mA (24V) Approx. 4mA(24V)
单个持续电流 Continuous current	最高100mA Max. 100mA
气动马达标称速度 (使用添加润滑油的气体) Pneumatic motor speed	大约650转每分钟 Approx. 650U/min
空气消耗 Air consumption	大约400升每分钟 Approx. 400L/min
油瓶容量 Bottle capacity	500ml
6bar压力下的剪丝能力 Cutting rate at 6 bar	
实芯焊丝 Solid wire	最大1.2毫米 Max. 1.2mm
剪丝时间 Cutting time	1秒 1Sec


AT02S



压缩空气接头 Compressed air supply outlet	G1/4"
气管内径 Hose inside diameter	至少06mm min. 06mm
标称压力 Normal pressure	6bar
工作压力 Operation pressure	6-8bar
控制电压 Control voltage	NPN (0V DC) PNP (24V DC)
单阀功耗 Power demand	2.8W
工作电压 Operation voltage	10-30V DC
电流消耗 Current consumption	约4mA (24V) Approx. 4mA(24V)
单个持续电流 Continuous current	最高100mA Max. 100mA
气动马达标称速度 (使用添加润滑油的气体) Pneumatic motor speed	大约650转每分钟 Approx. 650U/min
空气消耗 Air consumption	大约400升每分钟 Approx. 400L/min
油瓶容量 Bottle capacity	500ml
6bar压力下的剪丝能力 Cutting rate at 6 bar	
实芯焊丝 Solid wire	最大1.2毫米 Max. 1.2mm
剪丝时间 Cutting time	1秒 1Sec

* Mark: Std. configuration 标准配置

Cleaning station bracket 清枪器底座

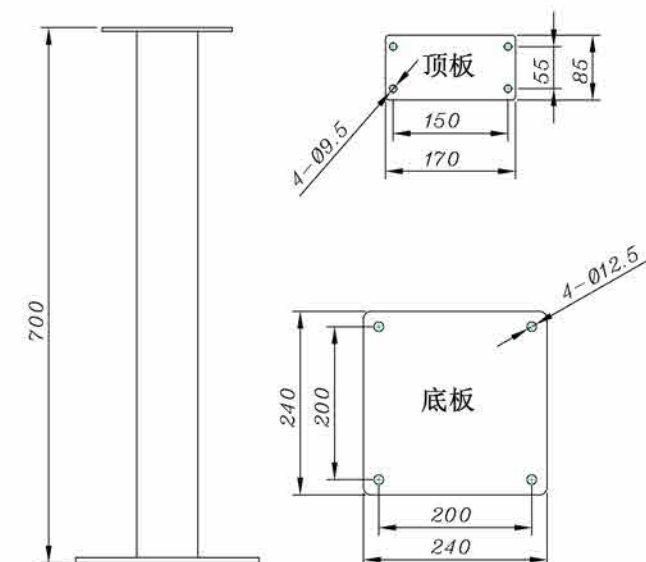

DD-20010

Torch cleaning station bracket AT01S/AT02S
清枪器底座-铁 AT01S/AT02S

Anti-spatter 清枪剂



Cooling anti-spatter. Water-base quality liquid. To prevent problem of silicone oil easily blocked the spray path of cleaning station. Also provides better cooling for welding torch.

Applications:

1. Suitable for CO₂ arc welding, preventing spatter adhesion and facilitating on surface, and easy cleanup.
2. Applicable to various types material, steel, stainless, aluminum and other metal welding processes.

冷却型防飞溅液, 优质液态防飞溅剂, 从根本上解决普通硅油易堵塞清枪器喷嘴孔的困扰, 液态防飞溅剂还能更好的冷却焊枪头。

主要用途:


1. 适用于气体保护焊、电弧焊及气割场所, 防止焊渣的粘连, 易于清理;
2. 适用于各种型号的碳钢、不锈钢及其它各种金属焊接;

EA-02200

Anti-spatter 500ml
防飞溅剂 500ml

* Mark: Std. configuration 标准配置

Anti-spatter 清枪绞刀

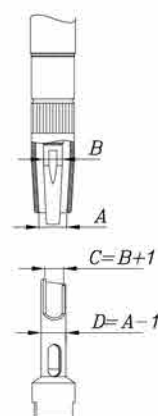

Reamer size depends on the torch contact tip and nozzle.
Reamer inside dimension = Contact tip outside dimension + 1mm
Reamer outside dimension = Nozzle inside dimension - 1mm
All special configuration is available to produce.

清枪绞刀尺寸根据使用的焊枪导电嘴和喷嘴选定;
清枪机构绞刀内径应比导电嘴外径大 1 mm,
外径应比喷嘴内径小 1 mm;
其他规格请咨询。

Reamer 清枪绞刀 AT01S/AT02S

ZRW-00123	C=09	D=011.5
ZRW-00133	C=09.5	D=012
ZRW-00154	C=011	D=014
ZRW-00164	C=011	D=015
ZRW-00193	C=09.5	D=018
ZRW-00204	C=011	D=019

Drum cone 焊丝桶帽



DD-90000	Drum cone 510 250kg drum usage 焊丝桶帽 510 250公斤桶用
DD-90001	Drum cone 660 350kg drum usage 焊丝桶帽 660 350公斤桶用

Wiretray bracket 焊丝盘架



	All brand robot model available 适配各厂家机器人
--	---

Wire straightener 焊丝矫直器



DD-99000	Wire straightener 5 bearings 9/16-18UNF 焊丝矫直器 5轮 9/16-18UNF
----------	--

* Mark: Std. configuration 标准配置

Wire conduit 导丝管

AR01



FA-03115	Quick connect 1.5M M14-1.5F*M14-1.5F
FA-03120	Quick connect 2.0M M14-1.5F*M14-1.5F
FA-03125	Quick connect 2.5M M14-1.5F*M14-1.5F
FA-03130	Quick connect 3.0M M14-1.5F*M14-1.5F
FA-03215	Quick connect 1.5M M14-1.5F*M14-1.5F Alu
FA-03220	Quick connect 2.0M M14-1.5F*M14-1.5F Alu
FA-03225	Quick connect 2.5M M14-1.5F*M14-1.5F Alu
FA-03230	Quick connect 3.0M M14-1.5F*M14-1.5F Alu

FA-03715	1.5M M14-1.5 F*9/16-18 F
FA-03720	2.0M M14-1.5 F*9/16-18 F
FA-03725	2.5M M14-1.5 F*9/16-18 F
FA-03730	3.0M M14-1.5 F*9/16-18 F


FA-03315	1.5M M14-1.5 F*M14-1.5 F
FA-03320	2.0M M14-1.5 F*M14-1.5 F
FA-03325	2.5M M14-1.5 F*M14-1.5 F
FA-03330	3.0M M14-1.5 F*M14-1.5 F
FA-03815	1.5M M14-1.5 F*M14-1.5 F Alu
FA-03820	2.0M M14-1.5 F*M14-1.5 F Alu
FA-03825	2.5M M14-1.5 F*M14-1.5 F Alu
FA-03830	3.0M M14-1.5 F*M14-1.5 F Alu

FA-03615	1.5M 7/16-20 F*9/16-18 F
FA-03620	2.0M 7/16-20 F*9/16-18 F
FA-03625	2.5M 7/16-20 F*9/16-18 F
FA-03630	3.0M 7/16-20 F*9/16-18 F

FA-03015	1.5M M14-1.5 F*Q.C.-M Euro
FA-03020	2.0M M14-1.5 F*Q.C.-M Euro
FA-03025	2.5M M14-1.5 F*Q.C.-M Euro
FA-03030	3.0M M14-1.5 F*Q.C.-M Euro

* Mark: Std. configuration 标准配置

AR02

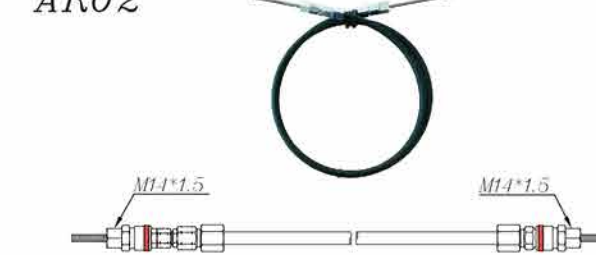

FA-110015	Quick connect 1.5M M14-1.5F*M14-1.5F
FA-110020	Quick connect 2.0M M14-1.5F*M14-1.5F
FA-110025	Quick connect 2.5M M14-1.5F*M14-1.5F
FA-110030	Quick connect 3.0M M14-1.5F*M14-1.5F
FA-130015	Quick connect 1.5M M14-1.5F*M14-1.5F Alu
FA-130020	Quick connect 2.0M M14-1.5F*M14-1.5F Alu
FA-130025	Quick connect 2.5M M14-1.5F*M14-1.5F Alu
FA-130030	Quick connect 3.0M M14-1.5F*M14-1.5F Alu

FA-103015	1.5M M14-1.5 F*9/16-18 F
FA-103020	2.0M M14-1.5 F*9/16-18 F
FA-103025	2.5M M14-1.5 F*9/16-18 F
FA-103030	3.0M M14-1.5 F*9/16-18 F

FA-102015	1.5M M14-1.5 F*M14-1.5 F
FA-102020	2.0M M14-1.5 F*M14-1.5 F
FA-102025	2.5M M14-1.5 F*M14-1.5 F
FA-102030	3.0M M14-1.5 F*M14-1.5 F
FA-120015	1.5M M14-1.5 F*M14-1.5 F Alu
FA-120020	2.0M M14-1.5 F*M14-1.5 F Alu
FA-120025	2.5M M14-1.5 F*M14-1.5 F Alu
FA-120030	3.0M M14-1.5 F*M14-1.5 F Alu

FA-105015	1.5M 7/16-20 F*9/16-18 F
FA-105020	2.0M 7/16-20 F*9/16-18 F
FA-105025	2.5M 7/16-20 F*9/16-18 F
FA-105030	3.0M 7/16-20 F*9/16-18 F

FA-100015	1.5M M14-1.5 F*Q.C.-M Euro
FA-100020	2.0M M14-1.5 F*Q.C.-M Euro
FA-100025	2.5M M14-1.5 F*Q.C.-M Euro
FA-100030	3.0M M14-1.5 F*Q.C.-M Euro


Wire alarm device
焊丝余量报警器



Designed for drum-pack welding wire, works with wire straightener. Alerts before wire runs out, enables connecting of wires to achieve non-stop wire change, saving time and reducing costs. Operates on 220V power supply, easy to set up.

适配桶装焊丝，配合矫直轮，在焊丝用完前报警，提前对接焊丝，实现换丝不停机，节省时间，降低成本，接 220V 电源，简单设置即可。

Wire joint device
焊丝对接机

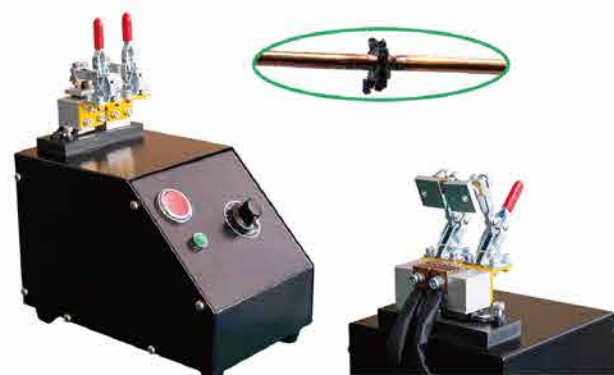

Design for easy mobility, compatible with 0.8-1.6mm welding wires, easy to operate. Require 220V power supply.

机身小巧,方便移动,可对接 0.8-1.6 焊丝,操作简单方便,接 220V 电源即可使用。

Water tank 循环冷却水箱

<i>Input power</i> 输入电压	220V 50HZ
<i>Tank capacity</i> 蓄水量	30L
<i>Rating power</i> 输出功率	372W
<i>Flow rate</i> 出水量	Min:15L/min Max: 20L/min
<i>Dimension</i> 全机尺寸	540*340*490(mm)
<i>Net wright</i> 空机重量	18KG



Customization 客制化产品

If standard product can't satisfy you, we can.....!
 一般的标准件无法满足您的使用需求吗？我们可依照您的需求量身订制各式特殊产品。



* *Mark: Std. configuration* 标准配置